

PRODUCT DATASHEET

Recessed Panel light HYD-102R-4W 4000K



Application

- Office
- Kitchen
- Rest room
- Corridor
- Shop

Benefits

- Flicker free.
- The light is soft and bright
- Drive stable, safe and reliable
- High light transmission mask to ensure uniform light

Features

- Efficient and durable
- Easy and quick installation
- Light body thin design, reduce space occupancy
- Die-cast aluminum body for better heat dissipation, anti-corrosion, and easy maintain

February,26,2024 Product Datasheet HYD-102R-4W 4000K





Electrical Data

Nominal wattage (W)	4W	
Nominal Voltage (V)	220-240 V	
Mains Frequency (Hz)	50	
Nominal Current (mA)	37	
LED Driver Current (mA)	300	
LED Driver Voltage (VDC)	5-12	
LED Driver Efficiency (%)	73%	
Power Factor λ	0.56	
Total harmonic distortion (%)		
Operating mode	External LED Driver	

Photometrical data

Luminous flux ±10% (lm)	284 lm		
Luminous efficacy	63 lm/w		
Color temperature	4000K		
Light color (designation)	Natural White		
Color rendering index Ra	≥80		
Standard deviation of color matching	≤5 SDCM		
Luminous intensity/cd	102		
Flickering	Flicker free		
Beam angle	111 °		






4000K

February, 26, 2024 Product Datasheet HYD-102R-4W 4000K



Dimensions & Weight

Diameter (mm)	105
Height (mm)	35
Product weight (g)	132



Material & Colors

Product color	All White	
Housing color	White	
Body material	Aluminum	
Cover material	PS LGP material	
Mercury content	0.0 mg	

Application & Mounting

Ambient temperature range	-20°C~+50 °C		
Temperature range at storage	-25°C~+60 °C		
Type of connection	Screwless terminal		
Type of protection	IP20		
Dimmable	No		
Mounting type	Recesse mounted		
Mounting location	Ceiling		
Application environment	Indoor		
Cut size (mm)	90		
LED module replaceable	Not replaceable		
With light source	Yes		




Certificates & Lifespan

Life (h)	50,000	
Certificates	CB LVD EMC RoHS	
Standards	ISO9001:2015	

Logistical Data

Product code	Dimensions	Pcs/	G.W.	Volume
	(L*W*H)	carton	kg	CBM
HYD-102R-4W	69.5*22*31.5 cm	50		0.04816

Installation Method

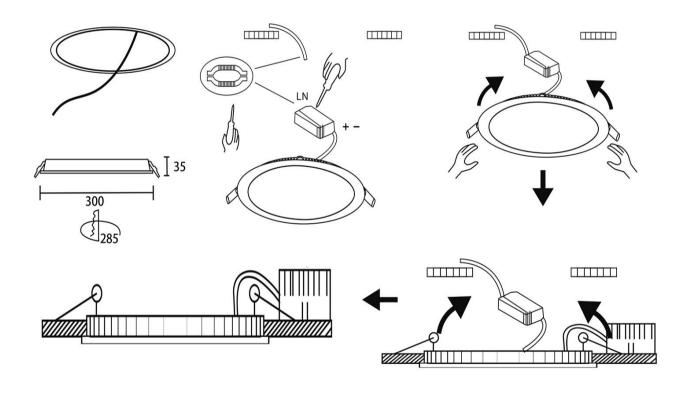

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.