

# **PRODUCT DATASHEET**

LAWN LIGHT HYD-L03-K12B-20W 3000K



## Application

- Courtyard
- Plaza
- Park
- Pedestrian street
- Meadow

### **Benefits**

- energy saving and environmental protection
- Low power, high light efficiency
- IP65 is water and dust resistant to harsh environment
- Lawn lights decorate the outdoor space to enhance high outdoor comfort

### Features

- Seiko aluminum, rust and corrosion resistant
- The lighting facilities around the lawn are important landscape facilities, and the installation method is also simple
- High light transmission mask ensures uniform light and reduces the lighting environment in dark areas

October,04,2024 Product Datasheet HYD-L03-K12B-20W 3000K





#### **Electrical Data**

Nominal wattage (W)	20W	
Nominal Voltage (V)	220-240V	
Mains Frequency (Hz)	50	
Nominal Current (mA)	179	
Power Factor $\lambda$	0.6	
Total harmonic distortion (%)		
Operating mode	Built in	

#### **Photometrical data**

Luminous flux ±10% (lm)	1006 lm		
Luminous efficacy	45 lm/w		
Color temperature	3000К		
Light color (designation)	Warm White		
Color rendering index Ra	≥80		
Standard deviation of color matching	≤5 SDCM		
Luminous intensity/cd	145		
Flickering	Flicker free		
Beam angle	C0-180,325 ° C90-270,107 °		

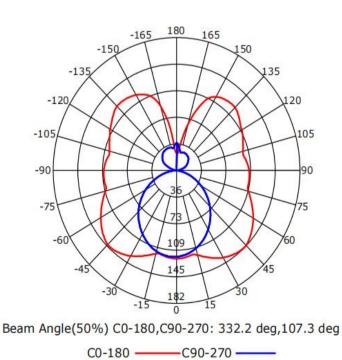

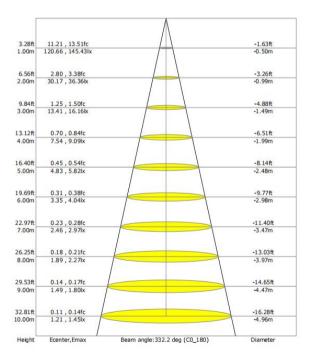


IES

October, 04, 2024 Product Datasheet HYD-L03-K12B-20W 3000K



# Dimensions & Weight

Diameter (mm)/A	150
Height (mm)/C	900
Product weight (g)	



### Material & Colors

Product color	Black housing / White LGP	
Housing color	Black	
Body material	Aluminum	
Cover material	PC	
Mercury content	0.0 mg	

### **Application & Mounting**

Ambient temperature range	-10°C~+40 °C		
Temperature range at storage	-10°C~+40 °C		
Type of connection	Screw terminal		
Type of protection	IP65		
Dimmable	No		
Mounting type	Surface mounted		
Mounting location	Ground/Lawn		
Application environment	Outdoor		
Cut size (mm)	No		
LED module replaceable	Not replaceable		
With light source	Yes		




### **Certificates & Lifespan**

Life (h)	30,000	
Certificates	CB LVD EMC RoHS	
Standards	ISO9001:2015	

#### **Logistical Data**

Product code	Dimensions	Pcs/	G.W.	Volume
	(L*W*H)	carton	kg	CBM
HYD-L03-K12B-20W	36*36*95 cm	4	•••	0.12312

## **Installation Method**

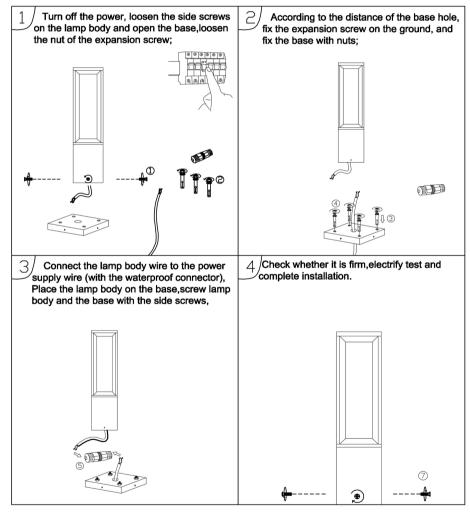

#### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release

October, 04, 2024 Product Datasheet HYD-L03-K12B-20W 3000K