
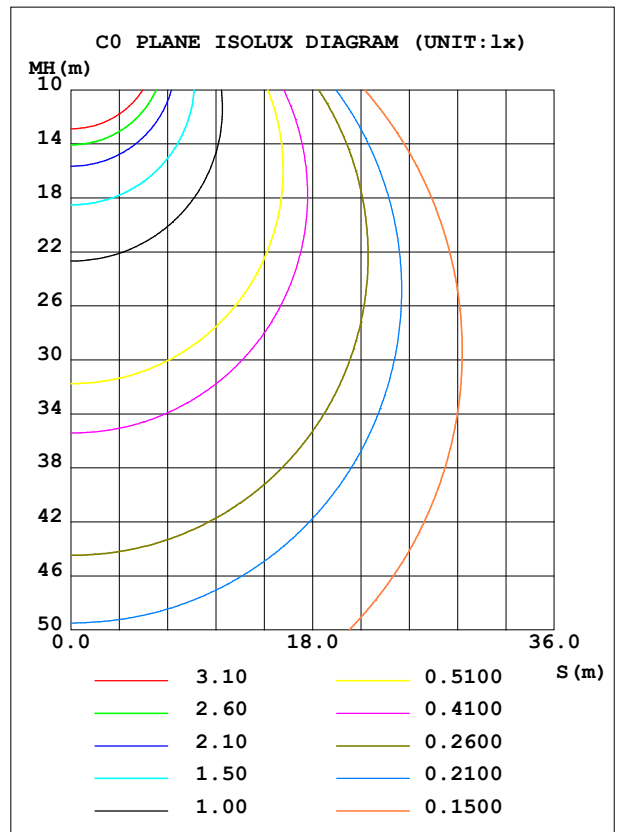


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.31V I:0.0722A P:15.525W PF:0.9759 Freq:50.00Hz Lamp Flux:1677.71x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 108.06 lm/W
MODEL	122CR	I _{max} (cd)	508.2	S/MH (C0/180)	1.28	
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	1.29	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1677.7	η UP, DN (C0-180)	1.9, 48.2	
NOMINAL FLUX (lm)	1677.71	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.8, 48.1	
LAMPS INSIDE	1	η up (%)	3.7	CIBSE SHR NOM	1.50	
TEST VOLTAGE (V)	219.5	η down (%)	96.3	CIBSE SHR MAX	1.50	

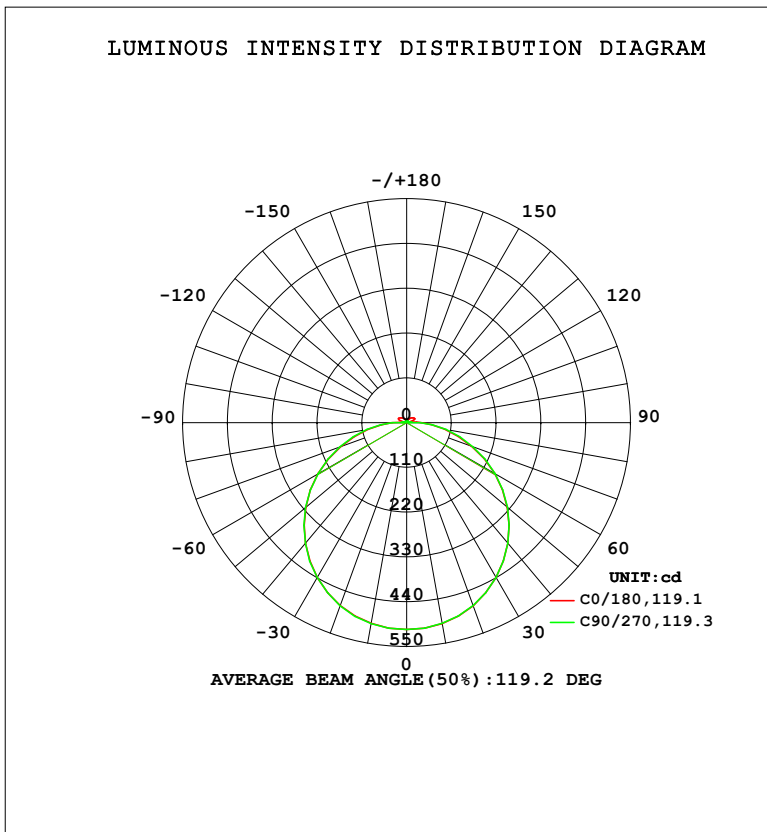

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	501.4	501.2	501.0	500.9	500.8	501.0	501.1	501.3	0- 10	48.17	48.17	2.87,2.87
20	478.4	478.2	478.0	477.8	477.9	478.0	478.6	478.4	10- 20	138.8	186.9	11.1,11.1
30	439.7	439.7	439.3	439.0	439.2	439.4	439.7	439.8	20- 30	212.3	399.2	23.8,23.8
40	387.0	387.1	387.0	386.7	386.9	386.9	387.4	387.3	30- 40	259.5	658.7	39.3,39.3
50	323.0	323.2	323.5	322.8	324.1	324.4	324.7	324.2	40- 50	275.1	933.8	55.7,55.7
60	249.7	250.5	251.0	250.4	251.4	252.0	252.1	251.6	50- 60	257.7	1192	71,71
70	170.4	172.6	173.1	173.1	173.0	174.3	174.3	173.7	60- 70	210.3	1402	83.6,83.6
80	94.24	96.94	98.30	98.46	96.86	98.28	99.11	97.94	70- 80	142.7	1545	92.1,92.1
90	36.43	35.05	34.37	33.91	36.20	31.70	36.55	37.06	80- 90	71.17	1616	96.3,96.3
100	10.65	8.123	13.01	7.242	2.311	9.576	13.10	8.061	90-100	17.76	1633	97.4,97.4
110	19.09	6.466	2.843	7.227	19.52	6.670	3.043	6.346	100-110	8.121	1642	97.8,97.8
120	22.12	8.147	4.091	8.944	22.79	8.637	4.738	8.990	110-120	10.09	1652	98.4,98.4
130	18.75	9.218	4.262	9.903	19.10	9.622	4.256	5.893	120-130	9.496	1661	99,99
140	14.56	8.729	4.577	8.913	15.10	8.011	4.354	5.085	130-140	7.460	1669	99.5,99.5
150	10.22	4.227	4.746	4.221	10.96	4.322	4.348	4.470	140-150	4.824	1673	99.7,99.7
160	4.801	4.813	4.522	4.736	4.874	4.772	4.620	4.828	150-160	2.417	1676	99.9,99.9
170	4.963	4.904	4.812	4.816	5.005	4.893	4.855	4.986	160-170	1.363	1677	100,100
180	4.987	5.024	5.006	5.027	5.005	5.048	5.012	5.040	170-180	0.4806	1678	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 796.41 lm

%lum = 47.5%

%lamp = 47.5%

Conical surface Flux(130deg): 1304.2 lm

%lum = 77.7%


%lamp = 77.7%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.31V I:0.0722A P:15.525W PF:0.9759 Freq:50.00Hz Lamp Flux:1677.71x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

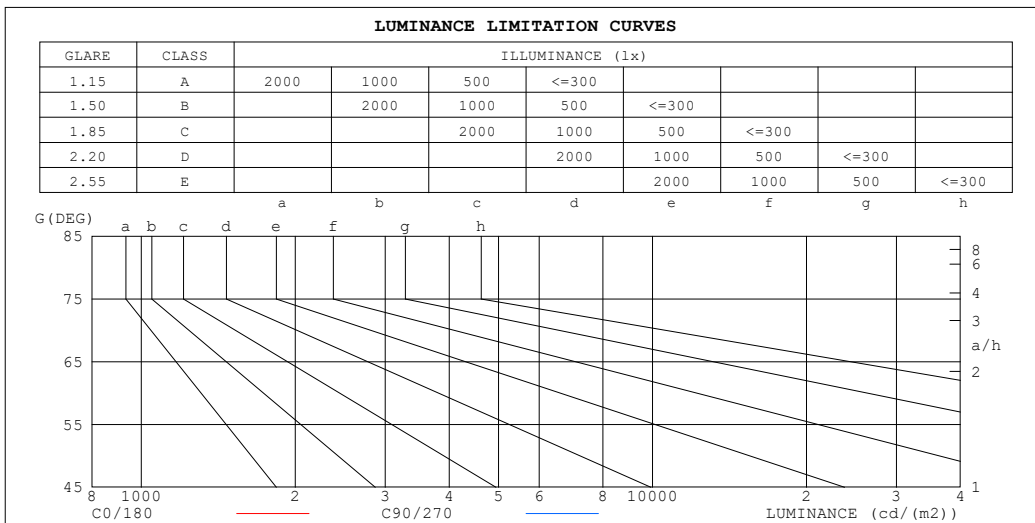

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	711	734
80	549	564
75	513	521
70	504	505
65	502	501
60	505	501
55	507	501
50	508	502
45	510	503


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.31V I:0.0722A P:15.525W PF:0.9759 Freq:50.00Hz Lamp Flux:1677.71x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.96
1.0	1.01	.96	.92	.99	.94	.90	.94	.90	.87	.89	.86	.83	.85	.82	.80	.78
2.0	.87	.80	.74	.85	.78	.73	.81	.75	.70	.77	.72	.68	.73	.70	.66	.64
3.0	.76	.68	.61	.74	.66	.60	.71	.64	.58	.68	.62	.57	.64	.60	.55	.53
4.0	.67	.58	.51	.66	.57	.50	.63	.55	.49	.60	.53	.48	.57	.52	.47	.45
5.0	.60	.51	.44	.59	.50	.43	.56	.48	.42	.54	.47	.42	.51	.45	.41	.39
6.0	.54	.45	.38	.53	.44	.38	.50	.43	.37	.48	.42	.36	.46	.40	.36	.34
7.0	.49	.40	.33	.48	.39	.33	.46	.38	.33	.44	.37	.32	.42	.36	.32	.29
8.0	.44	.36	.30	.43	.35	.29	.42	.34	.29	.40	.34	.29	.39	.33	.28	.26
9.0	.41	.32	.27	.40	.32	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24
10.0	.37	.29	.24	.37	.29	.24	.36	.28	.24	.34	.28	.23	.33	.27	.23	.21

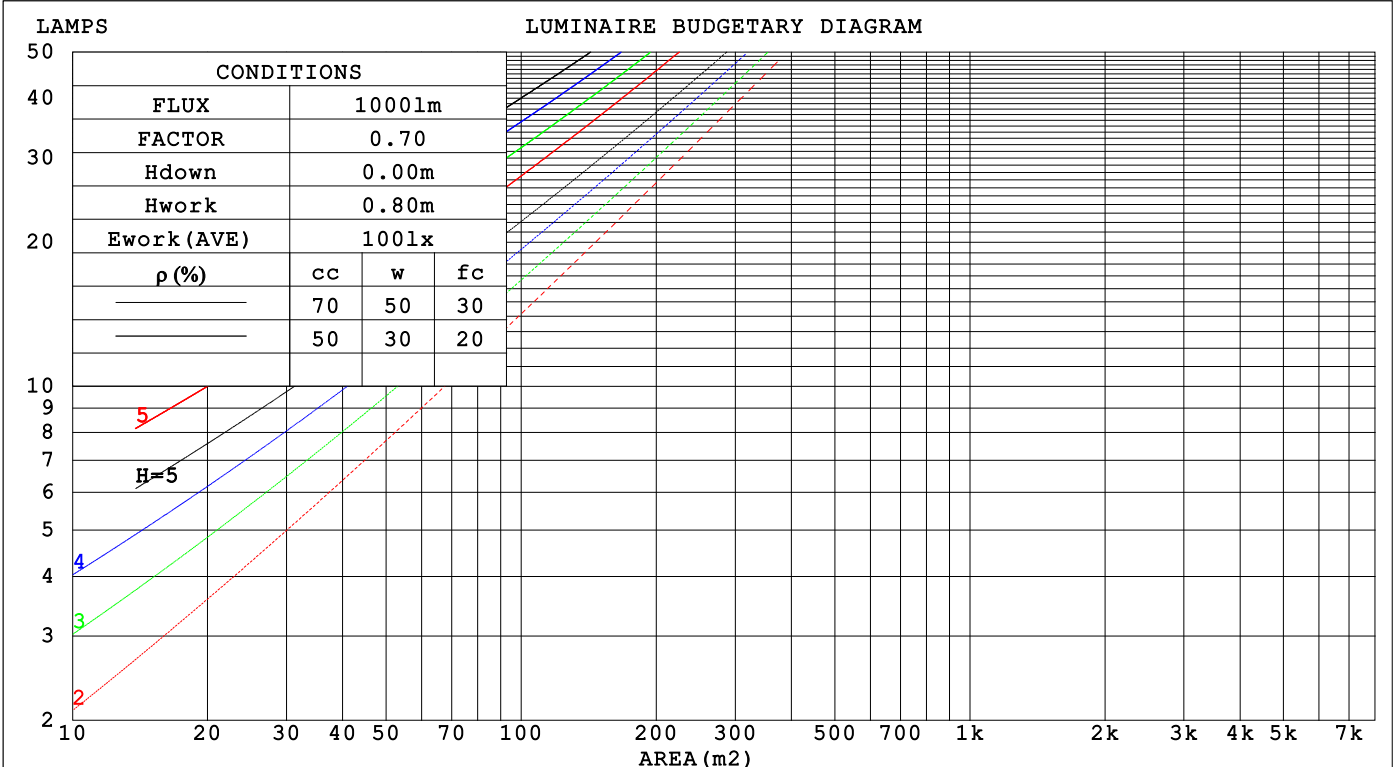

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.31V I:0.0722A P:15.525W PF:0.9759 Freq:50.00Hz								
Lamp Flux:1677.71x1 lm								
NAME:			TYPE: 122C			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.344	.196	.062	.336	.192	.061	.321	.184	.059	.306	.177	.057	.293	.170	.055	
2.0	.312	.171	.053	.305	.168	.052	.291	.162	.050	.278	.156	.049	.267	.151	.048	
3.0	.284	.151	.045	.277	.149	.045	.265	.144	.044	.254	.139	.043	.243	.135	.042	
4.0	.259	.135	.040	.253	.133	.039	.242	.129	.038	.232	.125	.038	.223	.121	.037	
5.0	.238	.121	.035	.233	.119	.035	.223	.116	.034	.214	.113	.034	.205	.110	.033	
6.0	.219	.110	.031	.215	.108	.031	.206	.105	.031	.198	.103	.030	.190	.100	.030	
7.0	.203	.100	.028	.199	.099	.028	.191	.097	.028	.184	.094	.027	.177	.092	.027	
8.0	.189	.092	.026	.185	.091	.026	.178	.089	.025	.171	.087	.025	.165	.085	.025	
9.0	.177	.086	.024	.173	.085	.024	.167	.083	.023	.161	.081	.023	.155	.079	.023	
10.0	.166	.080	.022	.163	.079	.022	.157	.077	.022	.151	.075	.021	.146	.073	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.219	.219	.219	.187	.187	.187	.128	.128	.128	.073	.073	.073	.023	.023	.023	
1.0	.211	.184	.160	.181	.158	.138	.124	.109	.095	.071	.063	.055	.023	.020	.018	
2.0	.204	.160	.124	.174	.138	.107	.119	.096	.075	.069	.056	.044	.022	.018	.014	
3.0	.196	.143	.101	.168	.123	.088	.115	.086	.061	.067	.050	.036	.021	.016	.012	
4.0	.188	.130	.086	.161	.112	.074	.111	.078	.052	.064	.046	.031	.021	.015	.010	
5.0	.181	.120	.075	.155	.104	.065	.107	.072	.046	.062	.043	.027	.020	.014	.009	
6.0	.173	.112	.067	.149	.097	.059	.103	.068	.042	.060	.040	.025	.019	.013	.008	
7.0	.166	.105	.062	.143	.091	.054	.099	.064	.038	.057	.038	.023	.019	.012	.008	
8.0	.160	.099	.057	.137	.086	.050	.095	.060	.036	.055	.036	.021	.018	.012	.007	
9.0	.153	.094	.054	.132	.082	.047	.092	.057	.034	.053	.034	.020	.017	.011	.007	
10.0	.148	.090	.051	.127	.078	.045	.088	.055	.032	.051	.032	.019	.017	.011	.006	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.31V I:0.0722A P:15.525W PF:0.9759 Freq:50.00Hz Lamp Flux:1677.71x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.5	10.0	8.9	10.3	10.6	8.5	10.0	8.8	10.3	10.6
3H	10.3	11.7	10.6	12.0	12.3	10.3	11.7	10.6	12.0	12.3
4H	11.1	12.4	11.5	12.8	13.1	11.1	12.4	11.5	12.8	13.1
6H	11.8	13.1	12.2	13.4	13.8	11.8	13.1	12.2	13.4	13.8
8H	12.1	13.3	12.5	13.7	14.0	12.2	13.4	12.6	13.7	14.1
12H	12.4	13.6	12.8	13.9	14.3	12.5	13.7	12.9	14.0	14.4
4H 2H	9.2	10.5	9.6	10.9	11.2	9.2	10.5	9.5	10.8	11.2
3H	11.2	12.3	11.6	12.7	13.1	11.1	12.3	11.6	12.7	13.1
4H	12.1	13.2	12.5	13.6	14.0	12.1	13.2	12.5	13.6	14.0
6H	13.0	13.9	13.4	14.4	14.8	13.0	14.0	13.5	14.4	14.9
8H	13.3	14.2	13.8	14.7	15.2	13.4	14.3	13.9	14.8	15.2
12H	13.7	14.6	14.2	15.0	15.5	13.9	14.7	14.3	15.1	15.6
8H 4H	12.5	13.4	12.9	13.8	14.3	12.5	13.4	13.0	13.8	14.3
6H	13.5	14.3	14.0	14.8	15.3	13.6	14.4	14.1	14.8	15.3
8H	14.1	14.7	14.6	15.2	15.8	14.1	14.8	14.7	15.3	15.8
12H	14.6	15.2	15.2	15.7	16.3	14.7	15.3	15.3	15.8	16.4
12H 4H	12.5	13.4	13.0	13.8	14.3	12.5	13.4	13.0	13.8	14.3
6H	13.7	14.3	14.2	14.8	15.4	13.7	14.4	14.2	14.9	15.4
8H	14.3	14.9	14.8	15.4	15.9	14.3	14.9	14.9	15.4	16.0

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.1	+ 0.1 / - 0.1
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.1 / - 0.3	+ 0.1 / - 0.3

CIE Pub.117, 1678 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.8)
Area: 1 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-11-23

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.31V I:0.0722A P:15.525W PF:0.9759 Freq:50.00Hz Lamp Flux:1677.71x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	54	42	35	54	42	35	52	42	35	28
0.80	64	52	44	63	52	44	61	51	44	36
1.00	72	61	53	71	60	53	68	61	52	44
1.25	79	68	61	78	67	60	75	66	59	51
1.50	85	74	66	83	73	66	79	71	64	56
2.00	92	82	75	89	81	74	85	78	72	63
2.50	96	87	80	93	85	79	89	82	77	68
3.00	99	91	85	97	90	84	92	86	81	72
4.00	103	97	92	101	95	90	96	91	87	77
5.00	106	101	96	103	98	94	98	94	91	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.31V I:0.0722A P:15.525W PF:0.9759 Freq:50.00Hz Lamp Flux:1677.71x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

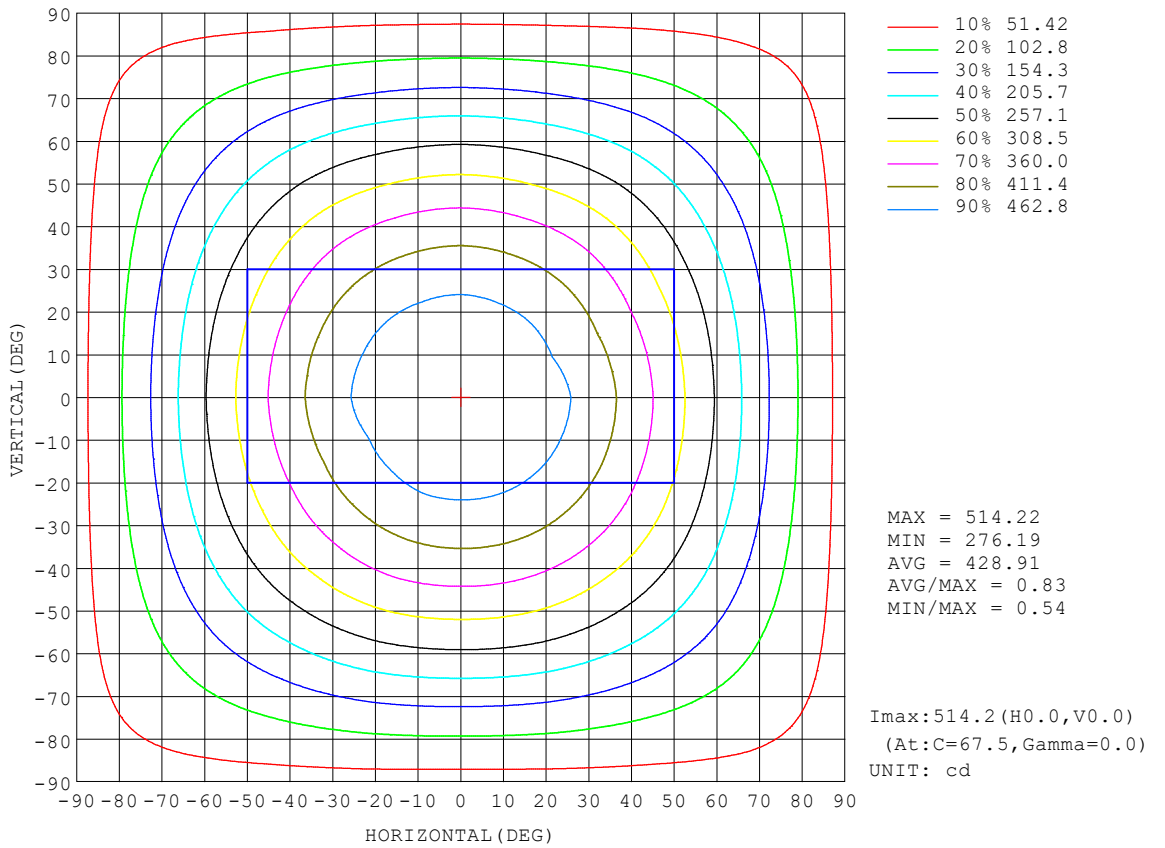


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.31V I:0.0722A P:15.525W PF:0.9759 Freq:50.00Hz Lamp Flux:1677.71lx1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

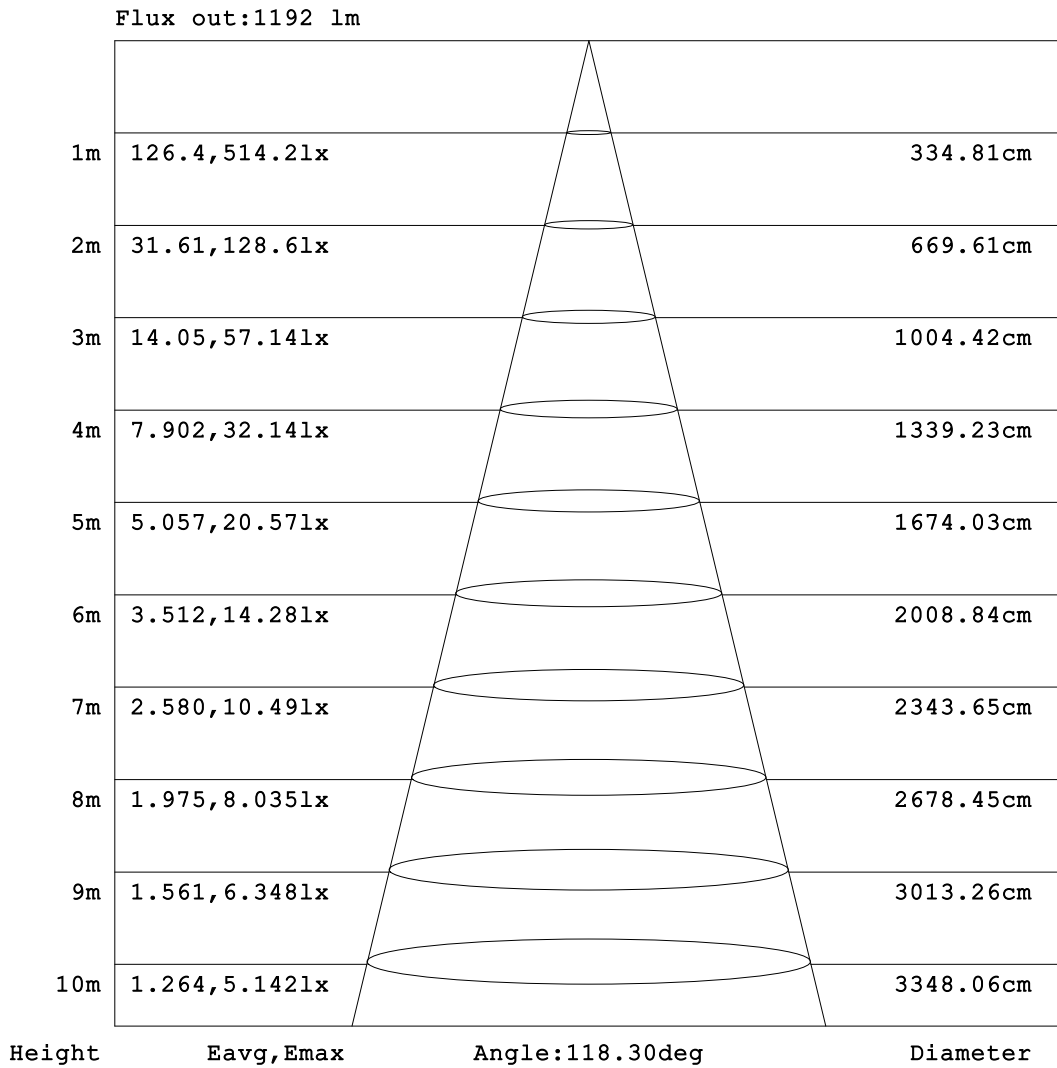


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-11-23

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity: 65.0%
Test Distance: 9.401m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.31V I:0.0722A P:15.525W PF:0.9759 Freq:50.00Hz Lamp Flux:1677.71x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

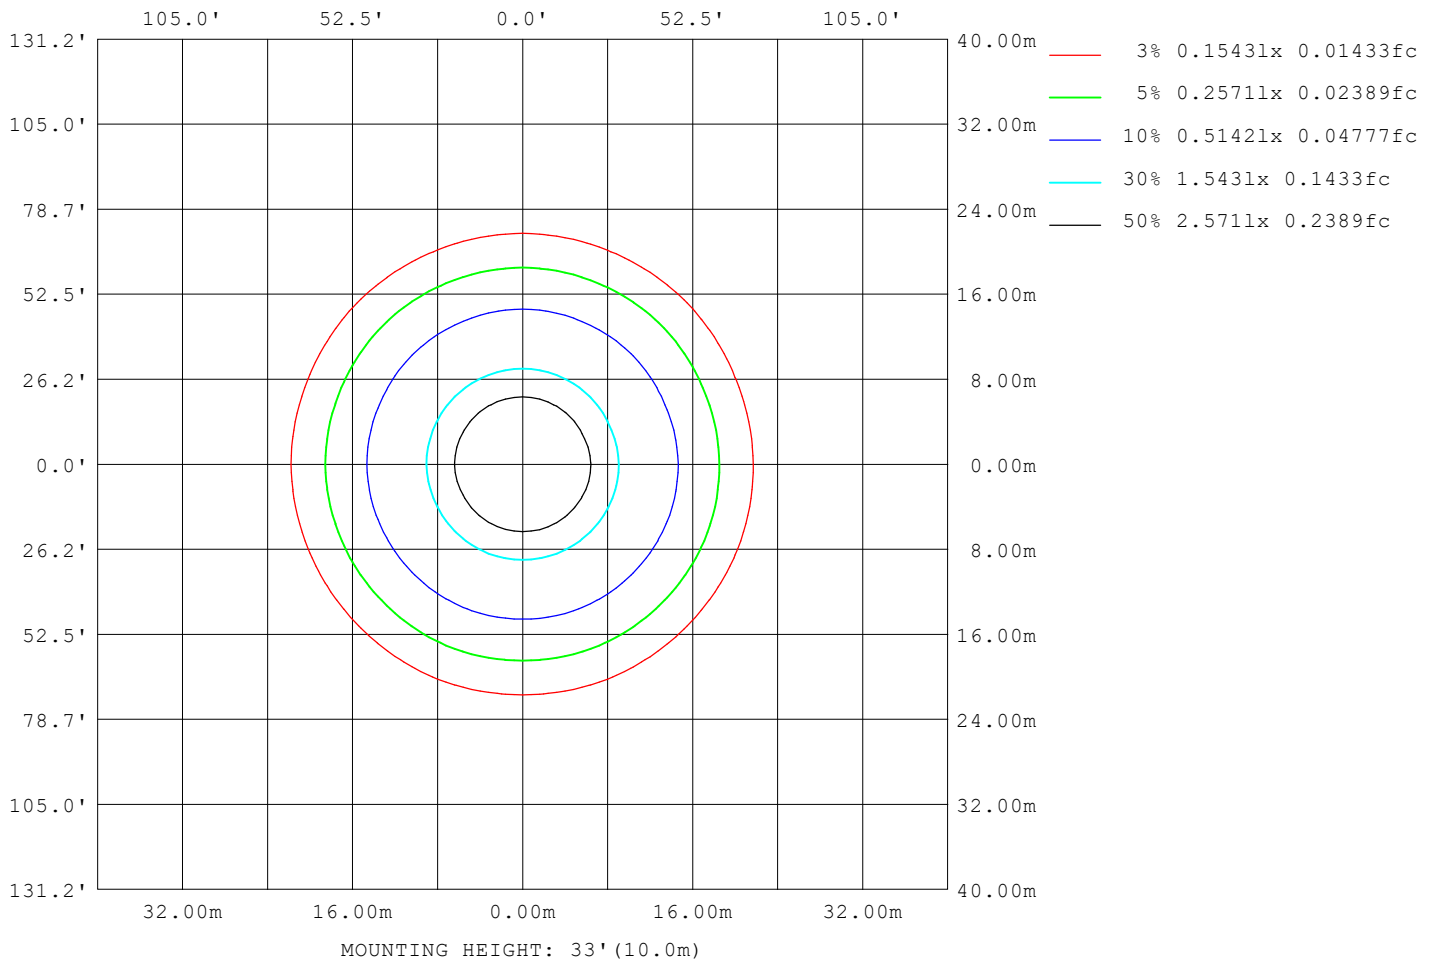

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.31V I:0.0722A P:15.525W PF:0.9759 Freq:50.00Hz Lamp Flux:1677.71x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	500
L_0~180 (75) av	512
L_0~180 (85) av	716
L_90~270 (65) av	504
L_90~270 (75) av	524
L_90~270 (85) av	743
L_45 (65) av	503
L_45 (75) av	522
L_45 (85) av	735

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

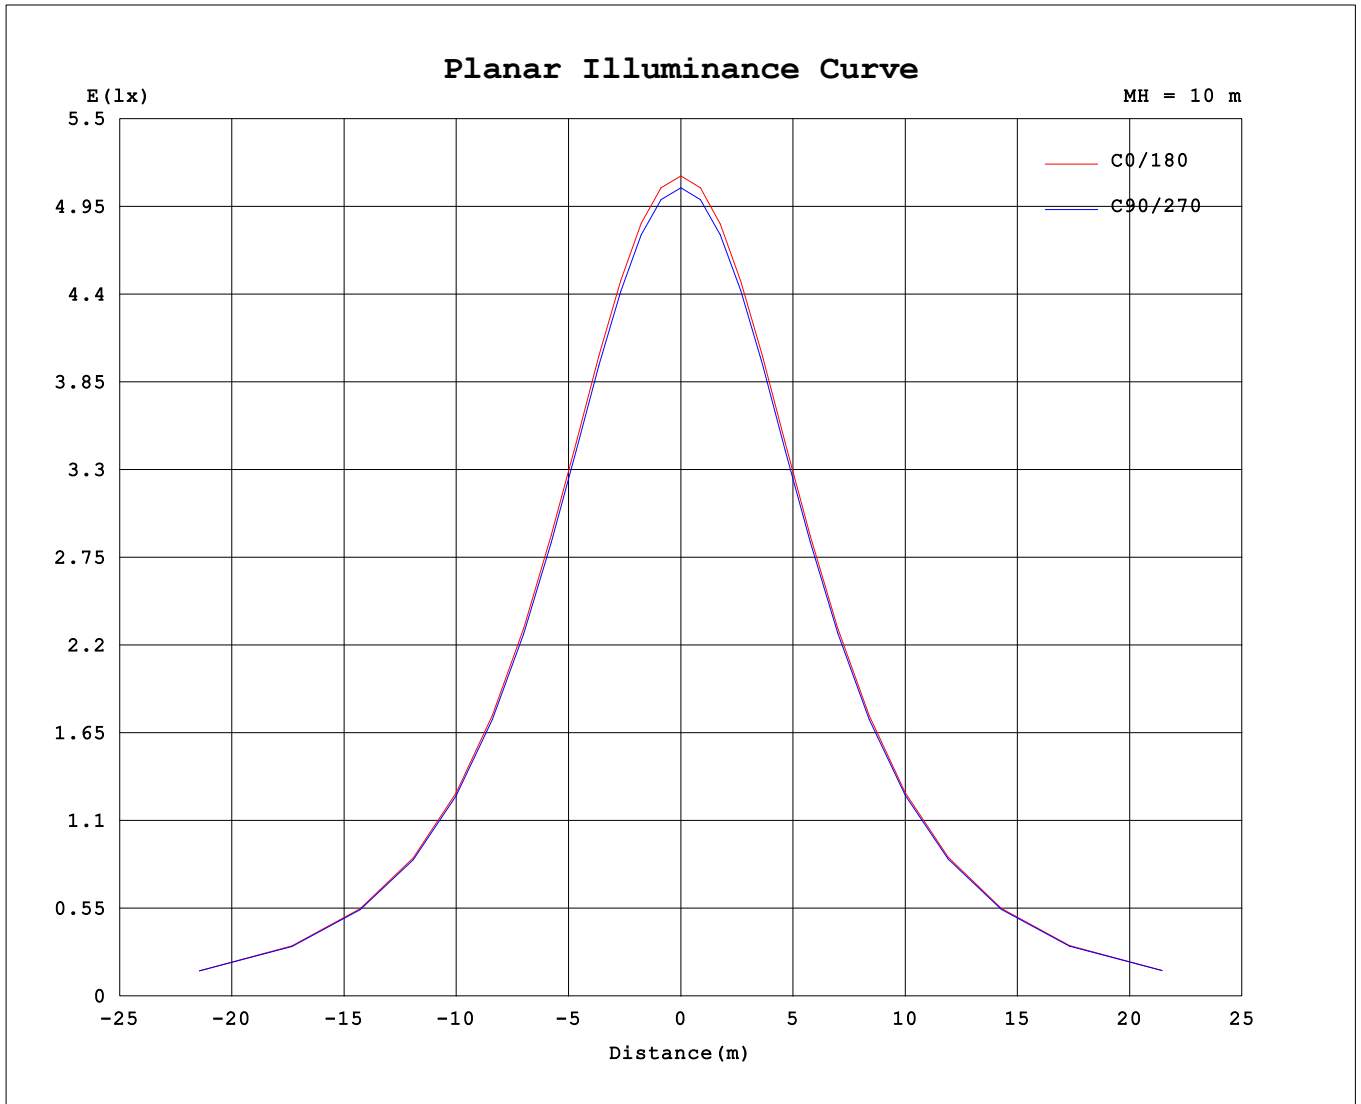

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.31V I:0.0722A P:15.525W PF:0.9759 Freq:50.00Hz Lamp Flux:1677.71x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	508	508	508	508	508	508	508	508	508	508	508	508	508	508	508	508			
5	507	507	507	507	507	507	507	507	507	506	506	507	506	505	507	507			
10	501	501	501	501	501	500	501	501	501	501	501	501	501	500	501	501			
15	492	492	492	492	492	490	491	492	491	491	491	491	492	490	492	492			
20	478	479	478	479	478	477	478	478	478	478	478	478	479	477	478	478			
25	461	461	461	461	461	461	460	461	460	460	461	460	461	459	461	460			
30	440	440	440	440	439	438	439	439	439	439	439	439	440	438	440	438			
35	415	416	415	416	415	414	414	415	415	414	415	415	415	414	415	414			
40	387	388	387	388	387	387	387	387	387	386	387	387	387	386	387	386			
45	356	357	357	358	356	357	356	357	357	356	357	356	357	355	357	355			
50	323	325	323	325	323	325	323	324	324	323	324	323	325	322	324	322			
55	287	289	288	290	288	289	288	289	289	287	289	288	289	287	289	287			
60	250	252	251	252	251	252	250	252	251	250	252	251	252	250	252	250			
65	210	213	212	214	212	214	212	213	213	212	213	212	213	211	213	211			
70	170	173	173	175	173	175	173	174	173	172	174	173	174	172	174	171			
75	131	134	134	136	135	137	135	135	134	134	135	135	136	135	135	133			
80	94.2	97.0	96.9	98.8	98.3	99.4	98.5	98.4	96.9	97.2	98.3	98.5	99.1	98.0	97.9	96.1			
85	61.3	63.4	63.3	64.5	64.1	65.2	64.6	64.8	63.6	63.6	64.0	64.7	65.3	64.3	64.2	62.6			
90	36.4	36.6	35.1	35.3	34.4	35.0	33.9	35.6	36.2	35.6	31.7	35.6	36.5	36.1	37.1	37.0			
95	25.0	19.9	6.91	4.82	5.97	4.74	4.96	11.0	16.8	10.5	4.75	5.95	8.21	5.67	7.60	20.6			
100	10.7	5.80	8.12	12.9	13.0	14.1	7.24	2.78	2.31	3.03	9.58	13.8	13.1	14.0	8.06	6.04			
105	6.76	6.88	3.30	5.07	6.40	6.48	5.32	7.53	7.56	7.37	4.52	7.52	8.36	7.29	4.17	7.17			
110	19.1	13.0	6.47	4.22	2.84	5.21	7.23	13.6	19.5	12.5	6.67	4.87	3.04	5.12	6.35	13.3			
115	22.6	14.9	7.39	5.06	5.63	5.36	8.00	15.5	22.9	13.3	7.22	6.14	6.60	5.68	6.95	14.2			
120	22.1	15.9	8.15	4.35	4.09	4.74	8.94	16.8	22.8	15.5	8.64	5.28	4.74	4.68	8.99	16.3			
125	20.7	15.1	8.71	4.94	3.79	5.38	9.49	16.1	21.0	15.6	9.17	5.58	3.99	5.11	9.39	16.2			
130	18.8	14.7	9.22	5.46	4.26	5.77	9.90	15.4	19.1	15.0	9.62	5.74	4.26	4.92	5.89	15.3			
135	16.8	14.2	9.49	5.69	4.69	5.90	9.83	14.3	17.2	14.0	9.56	5.95	4.35	5.75	4.42	13.9			
140	14.6	12.7	8.73	5.75	4.58	5.74	8.91	12.8	15.1	12.6	8.01	5.46	4.35	5.09	5.08	9.69			
145	12.4	11.1	5.94	5.77	4.76	5.79	6.60	11.3	13.1	11.1	6.13	5.06	4.35	4.91	6.22	8.56			
150	10.2	9.06	4.23	4.95	4.75	4.80	4.22	9.58	11.0	9.37	4.32	5.02	4.35	4.40	4.47	8.12			
155	6.57	4.49	4.49	4.52	4.45	4.53	4.48	4.45	6.75	4.64	4.56	4.48	4.55	4.62	4.62	4.69			
160	4.80	4.60	4.81	4.51	4.52	4.51	4.74	4.60	4.87	4.66	4.77	4.56	4.62	4.61	4.83	4.70			
165	4.77	4.83	4.99	4.93	4.70	4.83	4.86	4.78	4.85	4.84	4.92	4.91	4.79	4.85	4.98	4.88			
170	4.96	4.86	4.90	4.91	4.81	4.82	4.82	4.84	5.00	4.87	4.89	4.89	4.86	4.99	4.99	4.88			
175	5.19	5.24	5.11	5.18	5.07	5.07	5.03	5.16	5.21	5.18	5.11	5.09	5.10	5.18	5.20	5.22			
180	4.99	5.03	5.02	5.02	5.01	4.99	5.03	4.99	5.00	5.02	5.05	5.02	5.01	5.00	5.04	4.99			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks: