
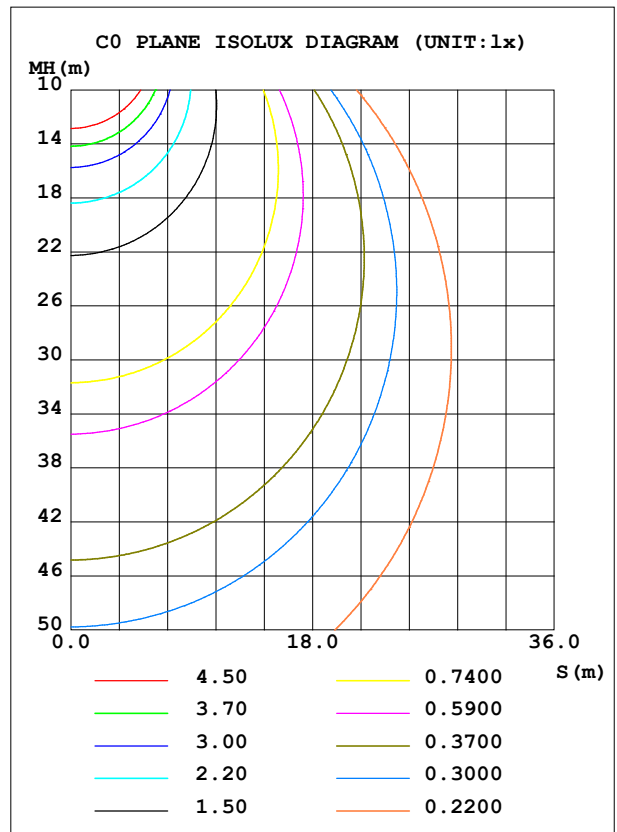


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.33V I:0.0920A P:19.926W PF:0.9835 Freq:50.00Hz Lamp Flux:2315.13x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 116.18 lm/W
MODEL	122CR	I _{max} (cd)	738.7	S/MH (C0/180)	1.27	
NOMINAL POWER (W)	20	LOR (%)	100.0	S/MH (C90/270)	1.26	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	2315.1	η UP, DN (C0-180)	1.5, 48.5	
NOMINAL FLUX (lm)	2315.13	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.5, 48.6	
LAMPS INSIDE	1	η up (%)	3.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	219.5	η down (%)	97.0	CIBSE SHR MAX	1.35	

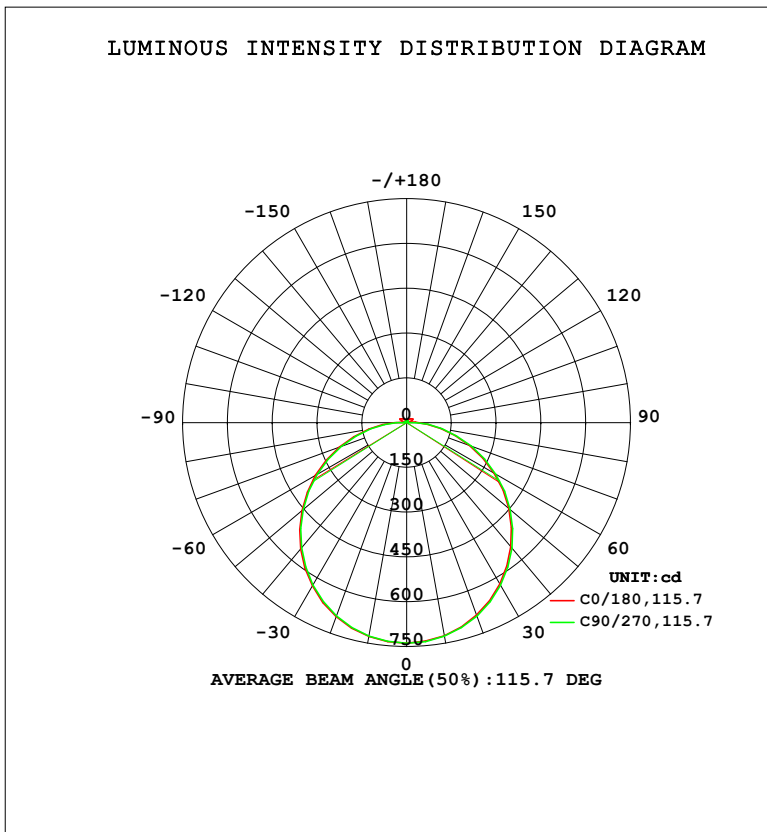

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	724.7	725.2	726.2	727.1	727.3	726.8	725.9	725.2	0- 10	69.91	69.91	3.02,3.02
20	685.9	686.8	689.3	690.5	691.4	690.4	688.8	687.4	10- 20	200.5	270.5	11.7,11.7
30	623.9	625.7	628.5	631.1	631.8	630.5	628.1	625.6	20- 30	304.7	575.2	24.8,24.8
40	542.7	544.8	548.4	551.8	552.9	550.9	547.8	544.5	30- 40	369.3	944.5	40.8,40.8
50	446.2	448.4	452.6	457.0	458.5	456.1	452.7	448.6	40- 50	387.3	1332	57.5,57.5
60	338.8	341.2	345.1	350.5	352.7	350.3	346.1	342.1	50- 60	358.0	1690	73,73
70	224.3	227.4	230.8	236.6	239.6	238.0	232.9	228.4	60- 70	286.6	1976	85.4,85.4
80	115.7	118.8	120.9	125.8	129.4	128.1	122.8	118.6	70- 80	186.5	2163	93.4,93.4
90	39.03	33.98	31.10	31.68	41.38	35.26	35.94	37.77	80- 90	83.86	2247	97,97
100	18.07	7.553	4.928	6.748	2.521	7.735	5.165	8.431	90-100	18.00	2265	97.8,97.8
110	11.78	7.498	3.311	9.109	16.81	8.245	4.573	7.975	100-110	7.806	2273	98.2,98.2
120	24.94	11.15	4.304	12.43	26.24	11.14	4.634	10.60	110-120	10.84	2283	98.6,98.6
130	20.51	11.32	5.861	12.47	21.55	12.13	5.791	7.040	120-130	11.26	2295	99.1,99.1
140	15.97	9.953	6.567	10.88	16.97	10.11	6.309	6.975	130-140	8.764	2304	99.5,99.5
150	11.11	7.257	6.424	7.608	12.06	7.486	5.718	7.636	140-150	5.889	2309	99.8,99.8
160	6.795	6.218	6.066	6.049	6.669	6.214	6.141	6.256	150-160	3.309	2313	99.9,99.9
170	6.533	6.441	6.291	6.237	6.569	6.323	6.370	6.492	160-170	1.788	2314	100,100
180	7.222	7.481	7.207	7.235	7.234	7.481	7.220	7.235	170-180	0.6407	2315	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1138.9 lm

%lum = 49.2%

%lamp = 49.2%

Conical surface Flux(130deg): 1844.3 lm

%lum = 79.7%


%lamp = 79.7%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.33V I:0.0920A P:19.926W PF:0.9835 Freq:50.00Hz Lamp Flux:2315.13x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

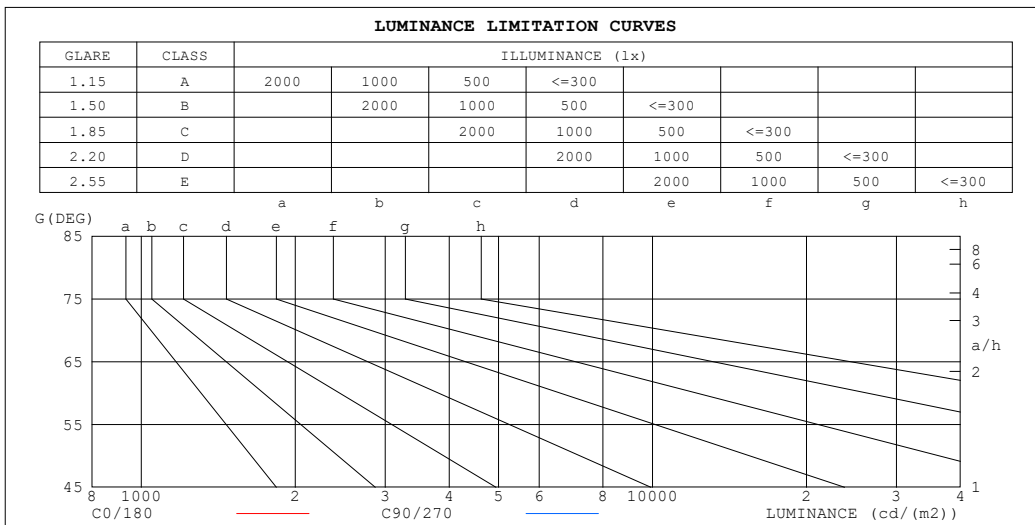

LUMINANCE cd/ (m2)		
G (DEG)	C0/180	C90/270
85	806	826
80	671	695
75	652	671
70	660	674
65	671	681
60	682	689
55	691	697
50	699	703
45	706	710


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.33V I:0.0920A P:19.926W PF:0.9835 Freq:50.00Hz Lamp Flux:2315.13x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.02	.97	.93	.99	.95	.91	.94	.91	.88	.90	.87	.85	.86	.84	.82	.79
2.0	.88	.81	.75	.86	.79	.74	.82	.76	.72	.78	.74	.70	.75	.71	.68	.65
3.0	.77	.69	.62	.75	.67	.61	.72	.65	.60	.69	.63	.58	.66	.61	.57	.54
4.0	.68	.59	.52	.67	.58	.52	.64	.56	.51	.61	.55	.49	.58	.53	.49	.46
5.0	.61	.51	.45	.59	.51	.44	.57	.49	.44	.55	.48	.43	.52	.47	.42	.40
6.0	.55	.45	.39	.53	.45	.39	.51	.44	.38	.49	.43	.37	.47	.41	.37	.35
7.0	.49	.40	.34	.48	.40	.34	.47	.39	.34	.45	.38	.33	.43	.37	.33	.31
8.0	.45	.36	.30	.44	.36	.30	.43	.35	.30	.41	.34	.30	.40	.34	.29	.27
9.0	.41	.33	.27	.41	.33	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.24
10.0	.38	.30	.25	.37	.30	.25	.36	.29	.24	.35	.29	.24	.34	.28	.24	.22

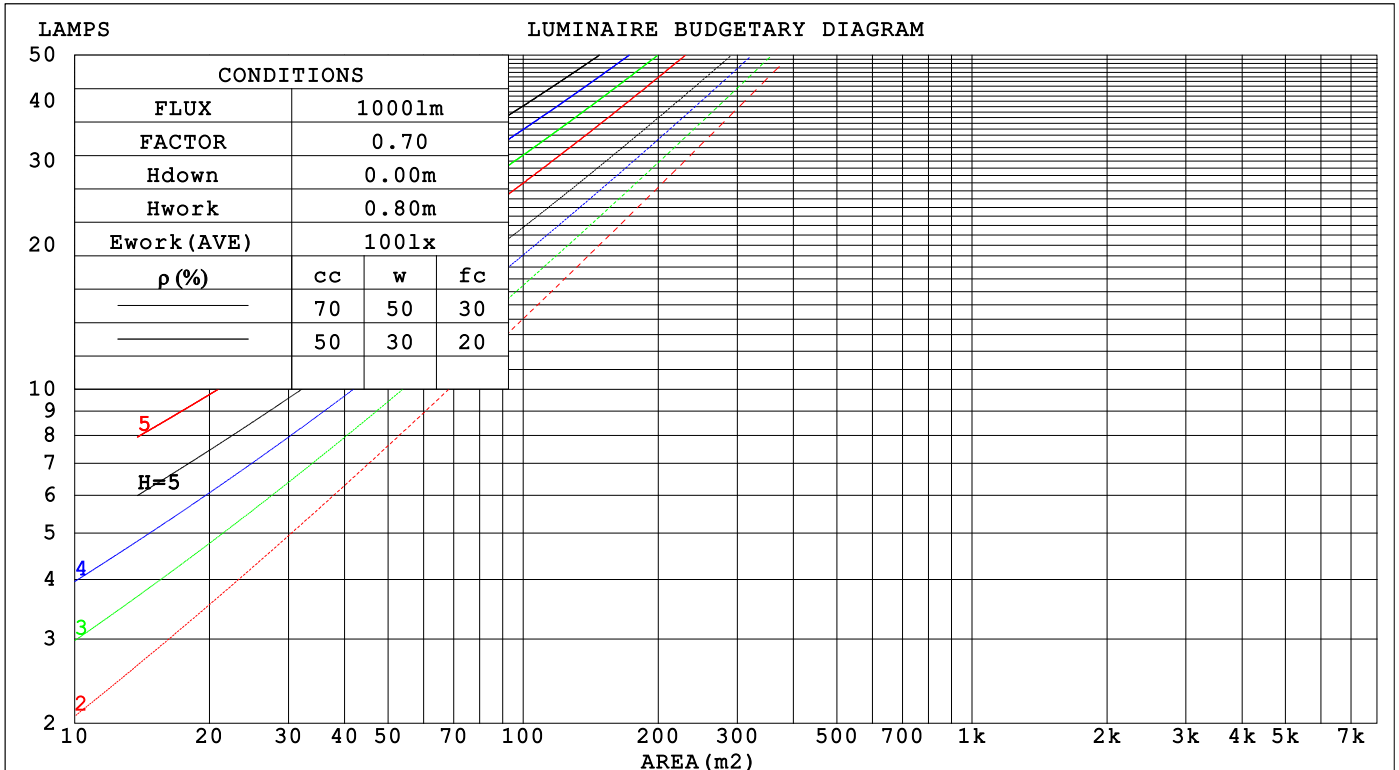

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.33V I:0.0920A P:19.926W PF:0.9835 Freq:50.00Hz								
Lamp Flux:2315.13x1 lm								
NAME:			TYPE: 122C			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.335	.190	.060	.327	.186	.059	.312	.179	.057	.298	.172	.055	.285	.165	.053	
2.0	.306	.168	.051	.299	.165	.051	.286	.159	.049	.273	.153	.048	.262	.148	.047	
3.0	.280	.149	.045	.273	.146	.044	.261	.142	.043	.250	.137	.042	.240	.133	.041	
4.0	.256	.133	.039	.250	.131	.039	.240	.127	.038	.230	.123	.037	.221	.120	.037	
5.0	.235	.120	.035	.230	.118	.034	.221	.115	.034	.212	.112	.033	.204	.109	.033	
6.0	.217	.109	.031	.213	.108	.031	.204	.105	.030	.196	.102	.030	.189	.099	.030	
7.0	.202	.100	.028	.198	.098	.028	.190	.096	.028	.183	.094	.027	.176	.092	.027	
8.0	.188	.092	.026	.184	.091	.026	.177	.089	.025	.171	.087	.025	.165	.085	.025	
9.0	.176	.085	.024	.173	.084	.024	.166	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.165	.079	.022	.162	.078	.022	.156	.077	.022	.151	.075	.021	.146	.073	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.213	.213	.213	.182	.182	.182	.124	.124	.124	.071	.071	.071	.023	.023	.023	
1.0	.205	.179	.155	.175	.153	.133	.120	.105	.092	.069	.061	.054	.022	.020	.017	
2.0	.197	.155	.119	.169	.133	.103	.116	.092	.072	.067	.054	.042	.021	.017	.014	
3.0	.189	.137	.096	.162	.118	.083	.111	.082	.058	.064	.048	.034	.021	.016	.011	
4.0	.182	.124	.080	.156	.107	.070	.107	.075	.049	.062	.044	.029	.020	.014	.010	
5.0	.174	.114	.070	.149	.099	.061	.103	.069	.043	.060	.040	.025	.019	.013	.008	
6.0	.167	.106	.062	.143	.091	.054	.099	.064	.038	.057	.038	.023	.019	.012	.007	
7.0	.160	.099	.056	.137	.086	.049	.095	.060	.035	.055	.035	.021	.018	.012	.007	
8.0	.153	.093	.052	.132	.081	.045	.091	.057	.032	.053	.033	.019	.017	.011	.006	
9.0	.147	.088	.048	.127	.076	.042	.088	.054	.030	.051	.032	.018	.017	.010	.006	
10.0	.141	.084	.046	.122	.073	.040	.084	.051	.028	.049	.030	.017	.016	.010	.006	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.33V I:0.0920A P:19.926W PF:0.9835 Freq:50.00Hz Lamp Flux:2315.13x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.5	10.0	8.8	10.2	10.5	8.5	10.0	8.8	10.3	10.5
3H	10.1	11.5	10.5	11.8	12.1	10.2	11.6	10.5	11.9	12.2
4H	10.9	12.2	11.2	12.5	12.8	10.9	12.3	11.3	12.6	12.9
6H	11.5	12.7	11.8	13.0	13.4	11.6	12.8	12.0	13.2	13.5
8H	11.7	12.9	12.1	13.2	13.6	11.8	13.0	12.2	13.4	13.7
12H	11.9	13.1	12.3	13.4	13.8	12.1	13.2	12.5	13.6	14.0
4H 2H	9.1	10.5	9.5	10.8	11.1	9.1	10.5	9.5	10.8	11.1
3H	11.0	12.1	11.4	12.5	12.9	11.0	12.2	11.4	12.5	12.9
4H	11.8	12.9	12.3	13.3	13.7	11.9	13.0	12.3	13.4	13.8
6H	12.6	13.5	13.0	14.0	14.4	12.7	13.7	13.1	14.1	14.5
8H	12.9	13.8	13.3	14.2	14.7	13.0	13.9	13.5	14.3	14.8
12H	13.2	14.0	13.7	14.4	14.9	13.3	14.2	13.8	14.6	15.1
8H 4H	12.2	13.1	12.6	13.5	13.9	12.2	13.1	12.7	13.6	14.0
6H	13.1	13.9	13.6	14.3	14.8	13.2	14.0	13.7	14.4	14.9
8H	13.5	14.2	14.0	14.7	15.2	13.7	14.3	14.2	14.8	15.3
12H	14.0	14.5	14.5	15.0	15.6	14.1	14.7	14.6	15.2	15.7
12H 4H	12.2	13.0	12.7	13.5	13.9	12.3	13.1	12.7	13.5	14.0
6H	13.2	13.9	13.7	14.4	14.9	13.3	14.0	13.8	14.4	15.0
8H	13.7	14.3	14.2	14.8	15.3	13.8	14.4	14.3	14.9	15.4

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.1	+ 0.1 / - 0.1
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.1 / - 0.3

CIE Pub.117, 2315 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.9)
Area: 1 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-11-23

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.33V I:0.0920A P:19.926W PF:0.9835 Freq:50.00Hz Lamp Flux:2315.13x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	43	36	55	43	36	53	43	36	29
0.80	65	53	46	64	53	45	62	52	45	38
1.00	73	62	54	72	61	54	70	62	53	46
1.25	80	69	62	79	69	61	76	67	60	53
1.50	85	75	68	84	74	67	80	72	66	58
2.00	92	83	76	90	82	75	86	79	74	65
2.50	97	88	82	94	87	81	90	84	78	69
3.00	100	93	87	98	91	85	93	87	83	73
4.00	104	98	93	102	96	91	97	92	88	78
5.00	107	101	97	104	99	95	99	95	92	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.33V I:0.0920A P:19.926W PF:0.9835 Freq:50.00Hz Lamp Flux:2315.13x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

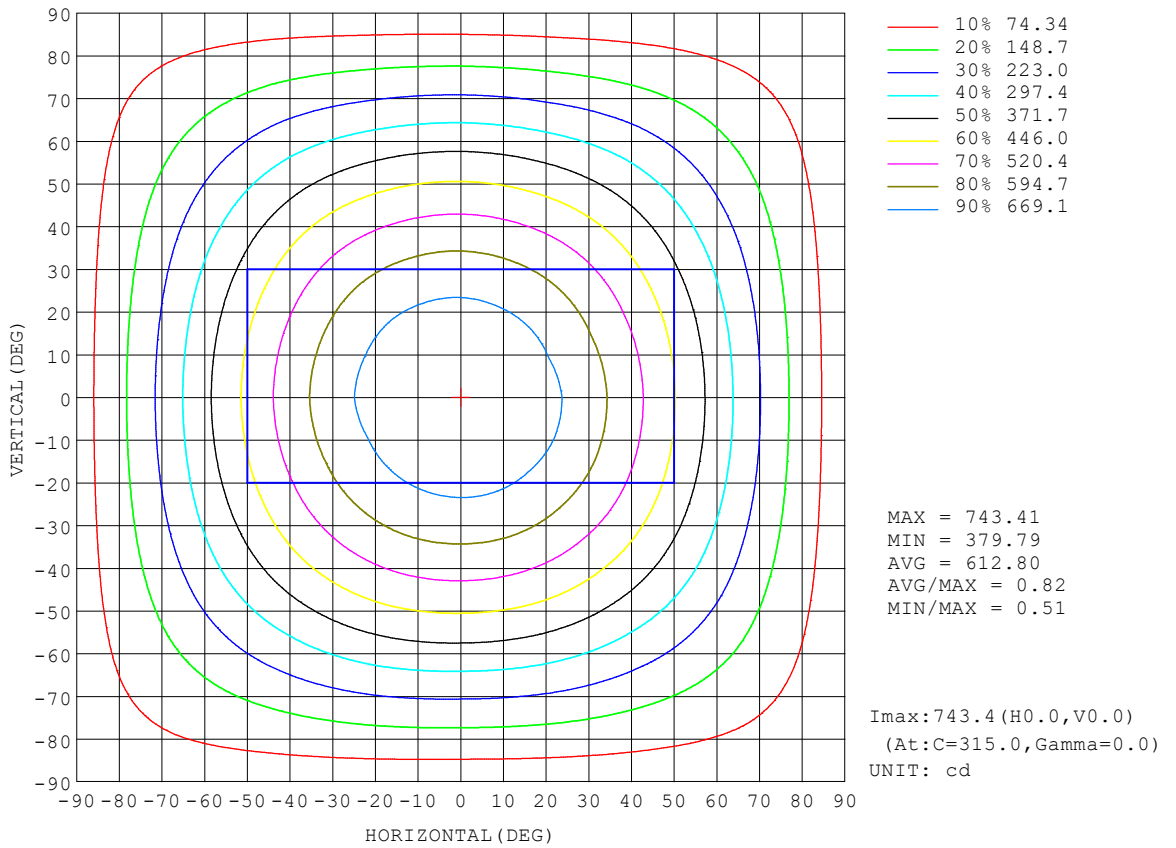


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.33V I:0.0920A P:19.926W PF:0.9835 Freq:50.00Hz Lamp Flux:2315.13x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

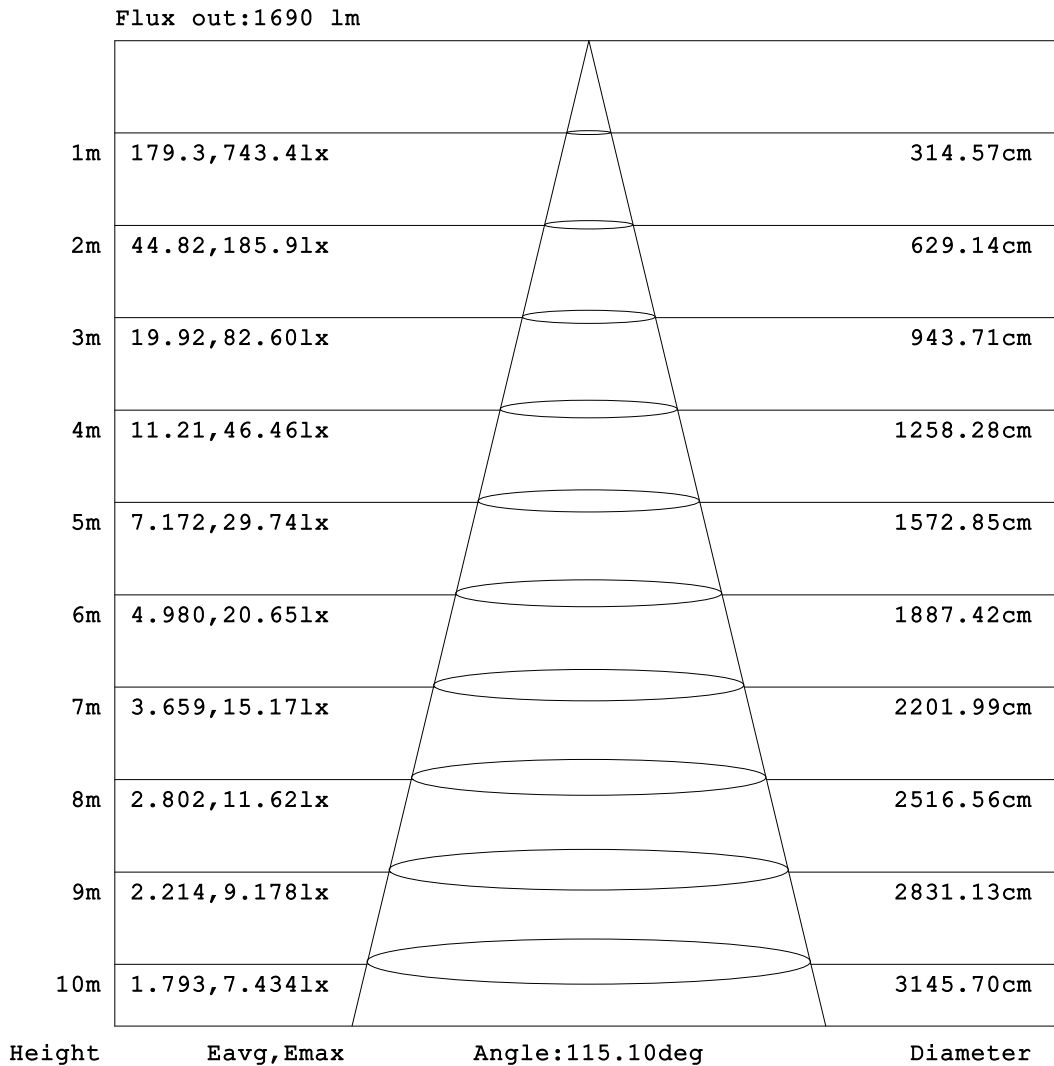


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-11-23

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity: 65.0%
Test Distance: 9.401m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.33V I:0.0920A P:19.926W PF:0.9835 Freq:50.00Hz Lamp Flux:2315.13x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

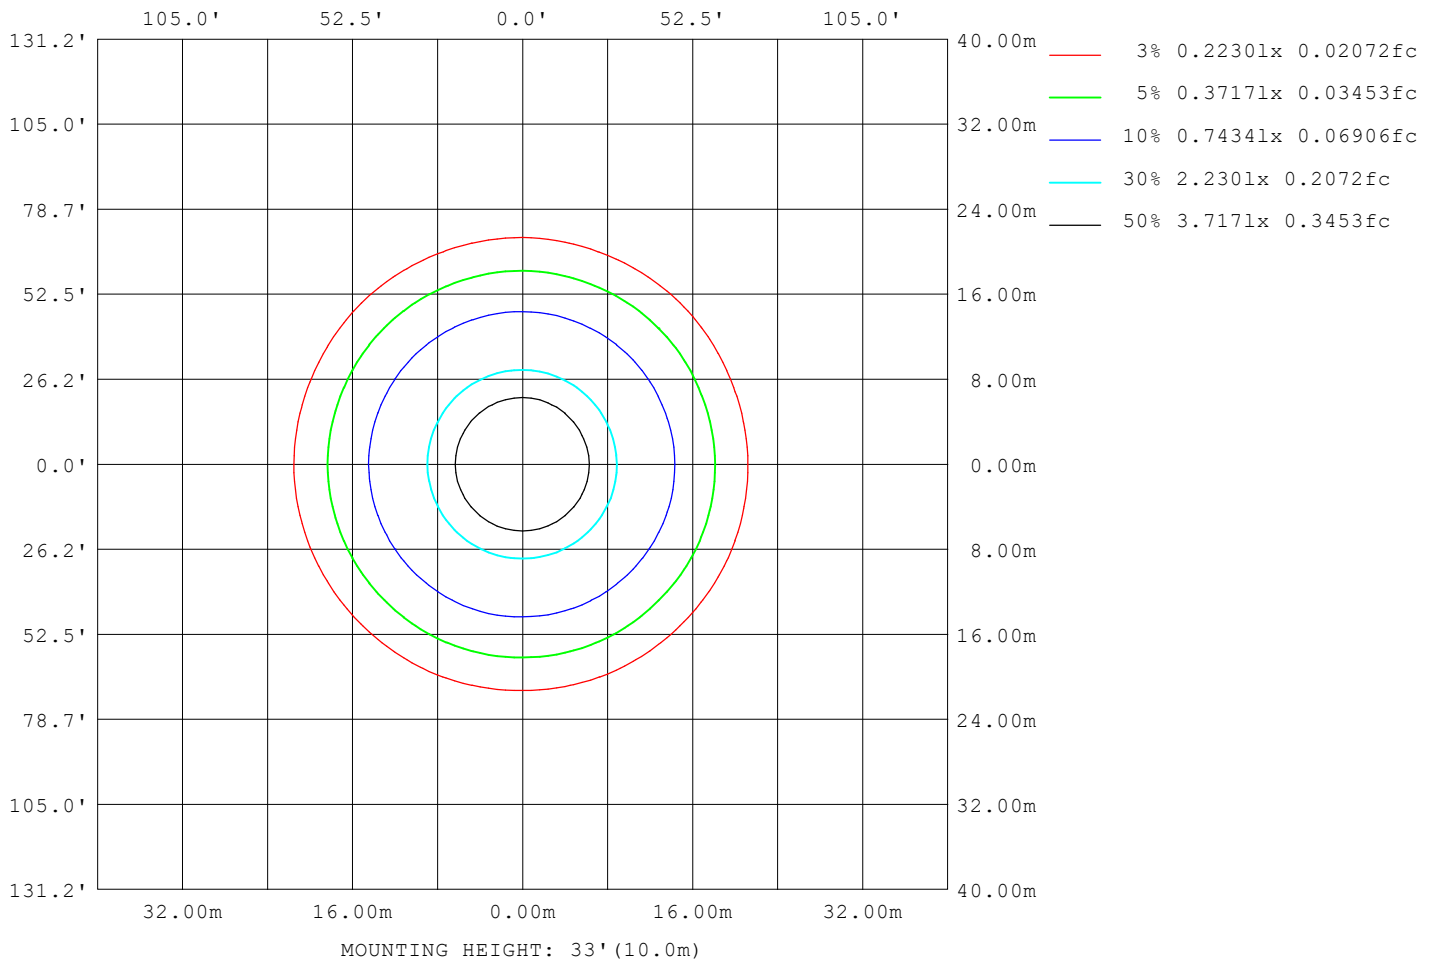

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.33V I:0.0920A P:19.926W PF:0.9835 Freq:50.00Hz Lamp Flux:2315.13x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	685
L_0~180 (75) av	678
L_0~180 (85) av	868
L_90~270 (65) av	684
L_90~270 (75) av	677
L_90~270 (85) av	841
L_45 (65) av	685
L_45 (75) av	681
L_45 (85) av	857

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

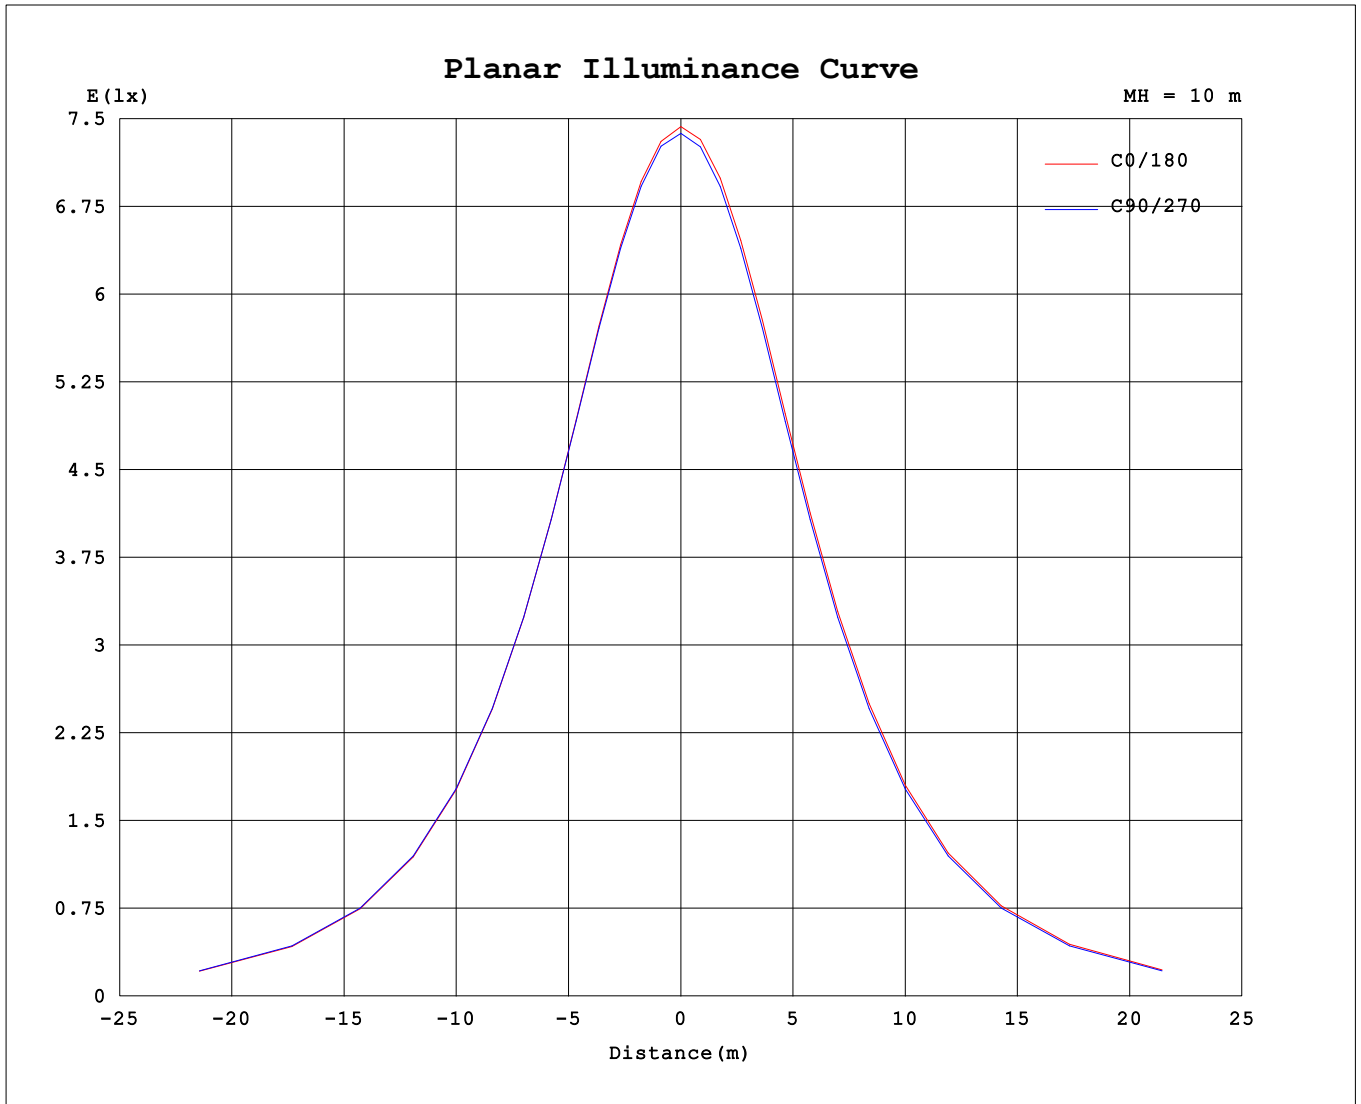

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.33V I:0.0920A P:19.926W PF:0.9835 Freq:50.00Hz Lamp Flux:2315.13x1 lm		
NAME:	TYPE: 122C	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	739	739	739	739	739	739	739	739	739	739	739	739	739	739	739	739			
5	735	735	735	735	736	736	736	737	736	736	736	735	736	736	735	735			
10	725	725	725	726	726	727	727	728	727	727	727	726	726	725	725	725			
15	708	709	709	710	711	712	712	713	712	712	712	711	710	710	709	709			
20	686	686	687	689	689	690	691	692	691	689	690	689	689	688	687	687			
25	658	658	659	661	662	663	664	665	664	661	663	662	661	660	659	658			
30	624	625	626	628	629	631	631	634	632	629	630	629	628	627	626	625			
35	585	587	587	590	591	593	594	596	594	592	593	591	590	588	587	586			
40	543	544	545	547	548	551	552	553	553	550	551	549	548	546	544	544			
45	496	498	498	501	503	506	506	508	507	504	505	503	502	500	498	497			
50	446	448	448	452	453	457	457	459	459	455	456	454	453	450	449	447			
55	394	395	396	399	400	405	405	407	407	404	404	402	400	397	396	395			
60	339	342	341	344	345	350	350	353	353	349	350	347	346	343	342	340			
65	282	285	284	288	288	294	294	298	297	293	295	291	290	286	286	282			
70	224	227	227	231	231	236	237	240	240	237	238	234	233	229	228	225			
75	168	171	171	174	174	179	180	183	183	181	182	177	176	172	172	169			
80	116	119	119	121	121	124	126	129	129	129	128	125	123	120	119	117			
85	69.8	71.6	71.1	72.0	72.1	74.7	76.8	80.6	81.5	80.3	79.3	75.8	74.5	72.0	71.5	70.2			
90	39.0	37.2	34.0	32.5	31.1	31.8	31.7	38.1	41.4	38.6	35.3	34.4	35.9	36.2	37.8	39.0			
95	30.1	23.1	7.22	5.28	6.27	4.92	2.44	12.2	18.5	11.5	3.00	6.95	9.46	7.19	9.51	24.7			
100	18.1	11.9	7.55	5.52	4.93	5.94	6.75	2.59	2.52	2.87	7.74	6.08	5.17	6.36	8.43	12.5			
105	7.40	5.46	4.26	6.62	7.53	9.45	6.27	5.00	5.48	5.57	6.72	10.7	9.74	10.6	4.90	5.90			
110	11.8	9.57	7.50	3.51	3.31	4.87	9.11	13.2	16.8	13.1	8.25	5.20	4.57	5.33	7.98	10.04			
115	21.8	16.5	9.32	4.26	3.45	4.52	10.7	19.4	25.5	18.0	8.88	4.97	3.77	4.54	8.87	16.8			
120	24.9	18.5	11.2	5.22	4.30	5.52	12.4	20.2	26.2	18.5	11.1	5.87	4.63	5.38	10.6	18.3			
125	22.7	17.7	11.5	6.08	5.24	6.41	12.7	19.3	23.9	18.9	12.4	6.68	5.50	5.31	11.3	18.6			
130	20.5	16.5	11.3	6.58	5.86	7.06	12.5	18.0	21.5	17.7	12.1	7.17	5.79	5.75	7.04	15.0			
135	18.3	15.5	10.8	7.14	6.22	7.59	11.9	16.7	19.4	16.4	11.5	7.53	6.32	7.51	6.61	12.7			
140	16.0	14.2	9.95	7.56	6.57	7.73	10.9	14.8	17.0	14.7	10.1	7.19	6.31	7.30	6.97	10.8			
145	13.4	12.3	7.92	6.88	6.67	6.81	8.36	13.0	14.4	12.8	7.43	6.51	6.39	5.60	7.95	11.1			
150	11.1	10.6	7.26	6.84	6.42	6.84	7.61	11.2	12.1	11.1	7.49	6.13	5.72	6.00	7.64	10.4			
155	8.82	7.95	5.87	6.19	5.98	6.03	5.79	8.38	9.39	8.24	5.94	6.00	5.68	5.97	6.01	8.05			
160	6.79	6.05	6.22	6.02	6.07	5.98	6.05	6.05	6.67	6.10	6.21	6.11	6.14	6.02	6.26	6.18			
165	6.32	6.38	6.48	6.25	6.50	6.16	6.24	6.25	6.34	6.33	6.33	6.27	6.53	6.31	6.52	6.42			
170	6.53	6.38	6.44	6.42	6.29	6.25	6.24	6.25	6.57	6.30	6.32	6.30	6.37	6.47	6.49	6.38			
175	6.80	6.87	7.04	6.91	6.58	6.74	6.86	6.92	6.83	6.95	6.92	6.83	6.68	6.78	6.85	6.81			
180	7.22	7.25	7.48	7.20	7.21	7.21	7.23	6.98	7.23	7.23	7.48	7.21	7.22	7.20	7.23	7.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-23

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks: