
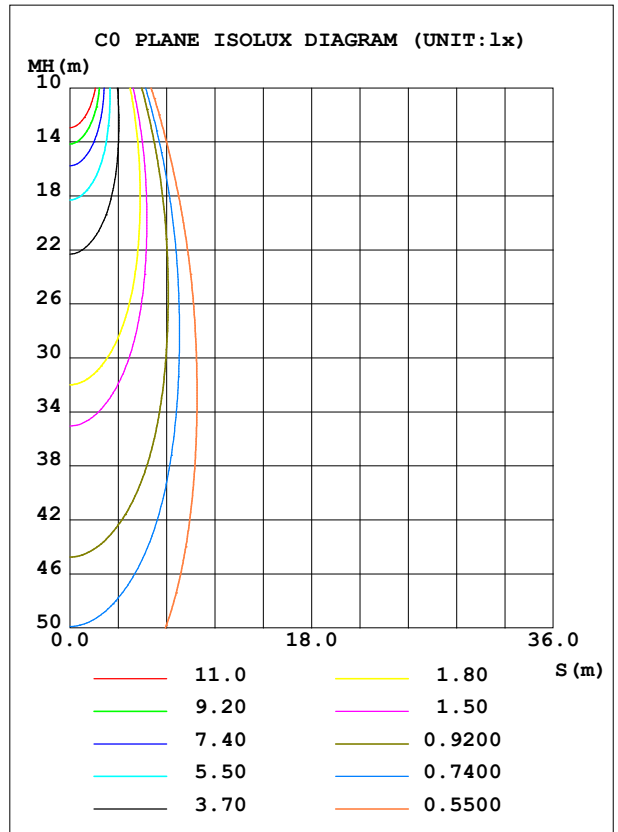


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.39V I:0.0605A P:7.3238W PF:0.5496 Freq:50.00Hz Lamp Flux:498.864x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 68.12 lm/W
MODEL	342CS	I _{max} (cd)	1838	S/MH (C0/180)	0.42	
NOMINAL POWER (W)	7	LOR (%)	100.0	S/MH (C90/270)	0.37	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	498.86	η UP, DN (C0-180)	0.0,56.2	
NOMINAL FLUX (lm)	498.864	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,43.8	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	219.5	η down (%)	100.0	CIBSE SHR MAX	0.30	

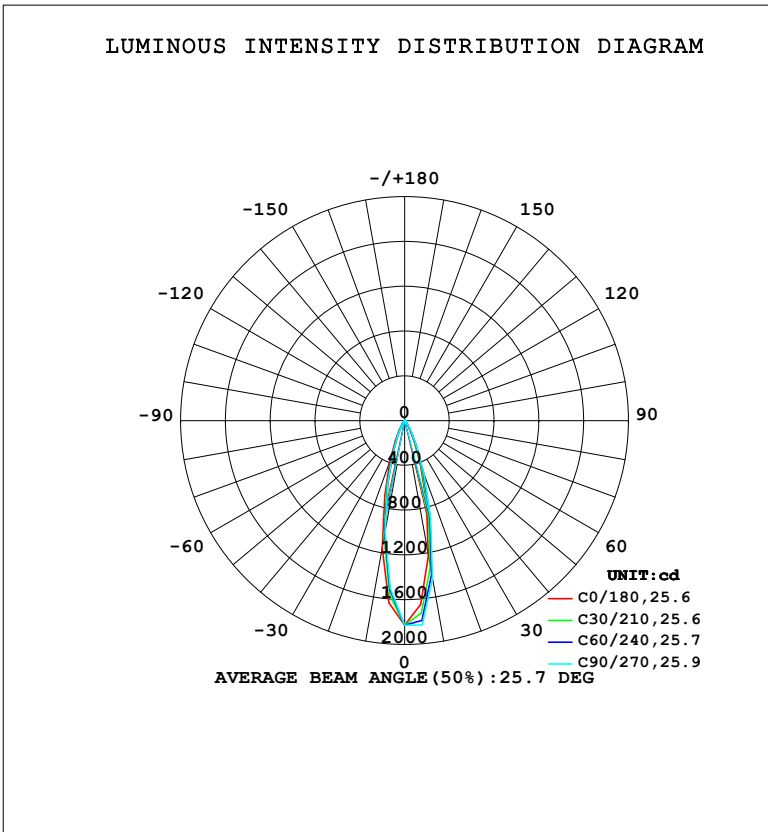

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1229	1378	1435	1348	1155	1033	1015	1090	0- 10	144.1	144.1	28.9,28.9
20	414.4	474.5	502.0	464.9	397.4	315.2	313.3	355.0	10- 20	209.3	353.4	70.8,70.8
30	102.6	118.9	127.8	120.9	98.05	75.28	73.09	83.79	20- 30	102.9	456.3	91.5,91.5
40	21.06	26.69	26.81	28.90	21.61	18.24	16.30	17.15	30- 40	33.75	490.0	98.2,98.2
50	1.701	4.392	1.553	4.748	2.020	2.700	1.777	2.269	40- 50	7.837	497.9	99.8,99.8
60	0.1435	0.0360	0.0422	0.0241	0.0238	0.1987	0.1745	0.2183	50- 60	0.7996	498.7	100,100
70	0.0897	0.0060	0.0121	0	0.0059	0.1803	0.1264	0.1937	60- 70	0.0937	498.8	100,100
80	0.0598	0	0	0	0	0.1083	0.1021	0.1393	70- 80	0.0719	498.8	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.0156	498.9	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 495.72 lm

%lum = 99.4%

%lamp = 99.4%

Conical surface Flux(130deg): 498.73 lm

%lum = 100.0%


%lamp = 100.0%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.39V I:0.0605A P:7.3238W PF:0.5496 Freq:50.00Hz Lamp Flux:498.864x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

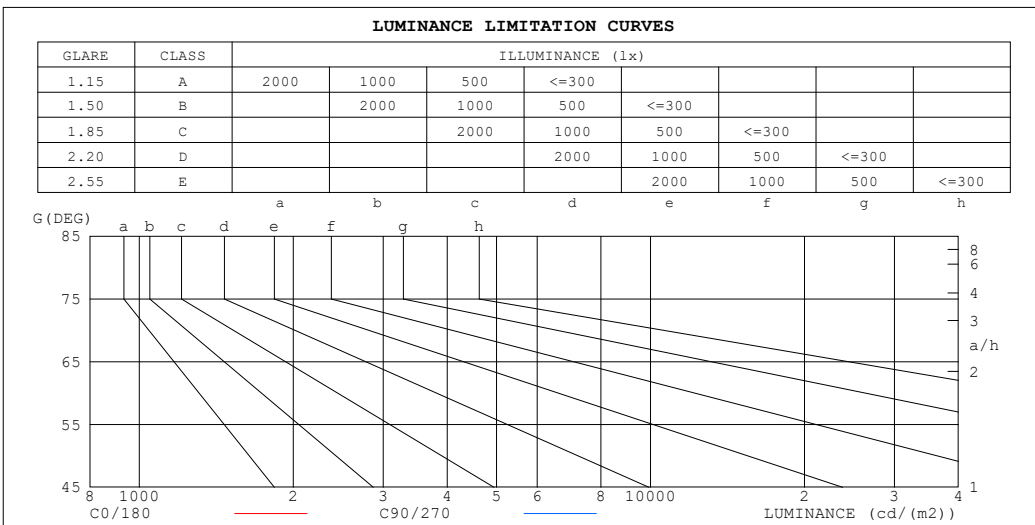

LUMINANCE cd/ (m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	3	0
75	3	0
70	3	0
65	3	0
60	3	1
55	4	2
50	27	24
45	90	113


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.39V I:0.0605A P:7.3238W PF:0.5496 Freq:50.00Hz Lamp Flux:498.864x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.09	1.10	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.07	1.04	1.01	1.05	1.02	.99	1.02	.99	.98	.99	.97	.96	.96	.95	.94	.92
3.0	1.02	.98	.95	1.00	.97	.94	.98	.95	.93	.96	.93	.91	.93	.91	.90	.88
4.0	.97	.93	.90	.96	.92	.89	.94	.91	.88	.92	.89	.87	.91	.88	.86	.85
5.0	.93	.89	.85	.92	.88	.85	.91	.87	.84	.89	.86	.84	.88	.85	.83	.82
6.0	.89	.85	.82	.89	.85	.81	.87	.84	.81	.86	.83	.80	.85	.82	.80	.79
7.0	.86	.82	.78	.86	.81	.78	.84	.81	.78	.83	.80	.77	.82	.79	.77	.76
8.0	.83	.79	.75	.83	.78	.75	.82	.78	.75	.81	.77	.75	.80	.77	.74	.73
9.0	.80	.76	.73	.80	.76	.73	.79	.75	.72	.78	.75	.72	.77	.74	.72	.71
10.0	.78	.73	.70	.77	.73	.70	.76	.73	.70	.76	.72	.70	.75	.72	.70	.69

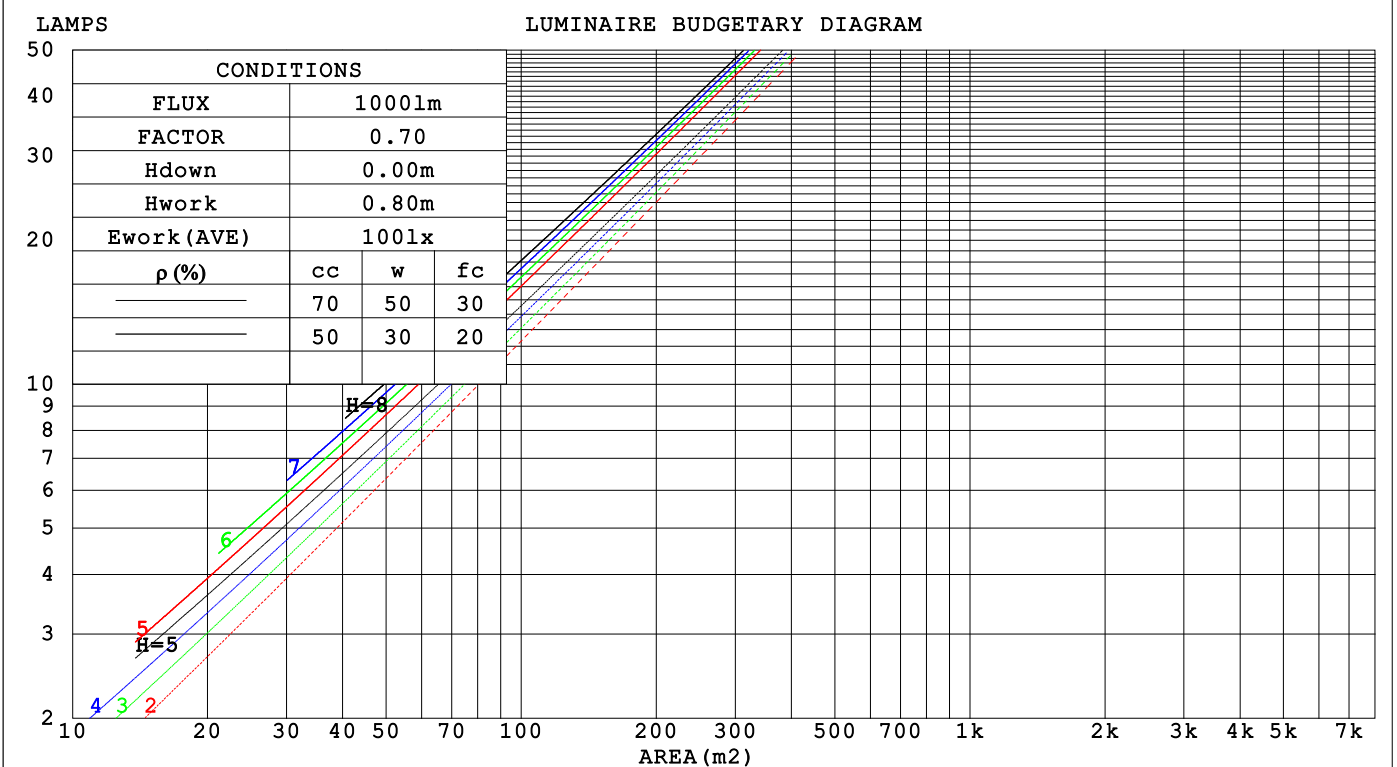

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.39V I:0.0605A P:7.3238W PF:0.5496 Freq:50.00Hz								
Lamp Flux:498.864x1 lm								
NAME:			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.144	.082	.026	.138	.079	.025	.125	.072	.023	.114	.066	.021	.103	.060	.019	
2.0	.135	.074	.023	.130	.071	.022	.119	.066	.021	.110	.062	.019	.101	.057	.018	
3.0	.127	.067	.020	.122	.065	.020	.114	.062	.019	.106	.058	.018	.098	.054	.017	
4.0	.119	.062	.018	.116	.060	.018	.108	.057	.017	.101	.054	.016	.095	.052	.016	
5.0	.113	.058	.017	.110	.056	.016	.103	.054	.016	.098	.052	.015	.092	.049	.015	
6.0	.107	.054	.015	.104	.053	.015	.099	.051	.015	.094	.049	.014	.089	.047	.014	
7.0	.102	.051	.014	.100	.050	.014	.095	.048	.014	.091	.046	.014	.086	.045	.013	
8.0	.098	.048	.013	.096	.047	.013	.091	.046	.013	.087	.044	.013	.084	.043	.013	
9.0	.094	.045	.013	.092	.045	.013	.088	.043	.012	.084	.042	.012	.081	.041	.012	
10.0	.090	.043	.012	.088	.043	.012	.085	.042	.012	.082	.041	.012	.079	.040	.011	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.151	.133	.117	.130	.114	.101	.089	.079	.071	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.095	.117	.098	.082	.081	.068	.058	.047	.040	.034	.015	.013	.011	
4.0	.125	.098	.078	.107	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.115	.086	.065	.099	.074	.056	.068	.052	.040	.039	.030	.024	.013	.010	.008	
6.0	.106	.076	.054	.091	.066	.047	.063	.046	.034	.037	.027	.020	.012	.009	.007	
7.0	.099	.068	.046	.085	.059	.040	.059	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.093	.061	.040	.080	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.087	.056	.035	.075	.048	.030	.052	.034	.021	.030	.020	.013	.010	.007	.004	
10.0	.082	.051	.030	.071	.044	.027	.049	.031	.019	.029	.018	.011	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.39V I:0.0605A P:7.3238W PF:0.5496 Freq:50.00Hz										
Lamp Flux:498.864x1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.:				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-0.4	0.3	-0.2	0.5	0.6	0.5	1.3	0.7	1.4	1.6
3H	-0.6	0.1	-0.3	0.3	0.5	0.4	1.0	0.6	1.2	1.4
4H	-0.6	-0.0	-0.4	0.2	0.4	0.3	0.9	0.6	1.1	1.4
6H	-0.7	-0.1	-0.4	0.1	0.3	0.2	0.8	0.5	1.0	1.3
8H	-0.8	-0.2	-0.5	0.0	0.3	0.2	0.7	0.5	1.0	1.2
12H	-0.8	-0.3	-0.5	-0.0	0.3	0.1	0.7	0.4	0.9	1.2
4H 2H	-0.6	-0.0	-0.4	0.2	0.4	0.3	0.9	0.6	1.1	1.4
3H	-0.8	-0.3	-0.5	-0.0	0.3	0.1	0.7	0.4	0.9	1.2
4H	-0.9	-0.4	-0.6	-0.1	0.2	0.0	0.5	0.4	0.8	1.1
6H	-1.0	-0.6	-0.6	-0.2	0.1	-0.1	0.4	0.3	0.7	1.0
8H	-1.1	-0.7	-0.7	-0.3	0.1	-0.1	0.3	0.3	0.6	1.0
12H	-1.1	-0.7	-0.7	-0.4	0.0	-0.2	0.2	0.2	0.6	1.0
8H 4H	-1.1	-0.7	-0.7	-0.3	0.1	-0.1	0.3	0.3	0.6	1.0
6H	-1.2	-0.8	-0.7	-0.4	-0.0	-0.2	0.1	0.2	0.5	0.9
8H	-1.2	-0.9	-0.8	-0.5	-0.1	-0.3	0.0	0.2	0.4	0.9
12H	-1.3	-1.0	-0.8	-0.6	-0.1	-0.3	-0.1	0.1	0.4	0.8
12H 4H	-1.1	-0.7	-0.7	-0.4	0.0	-0.2	0.2	0.2	0.6	1.0
6H	-1.2	-0.9	-0.8	-0.5	-0.1	-0.3	0.0	0.2	0.4	0.9
8H	-1.3	-1.0	-0.8	-0.6	-0.1	-0.3	-0.1	0.1	0.4	0.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.2 / -23.6					+ 3.1 / -31.7				
1.5H	+ 5.7 / -24.1					+ 5.7 / -28.2				
2.0H	+ 8.6 / -16.5					+ 9.0 / -25.6				

CIE Pub.117, 498.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.4)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.39V I:0.0605A P:7.3238W PF:0.5496 Freq:50.00Hz Lamp Flux:498.864x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	85	81	90	85	81	89	84	81	78
0.80	97	92	89	97	92	89	96	91	88	85
1.00	101	96	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	107	103	100	106	102	100	104	101	99	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	107	104	102	96
3.00	113	109	107	111	108	106	108	105	104	97
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.39V I:0.0605A P:7.3238W PF:0.5496 Freq:50.00Hz Lamp Flux:498.864x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

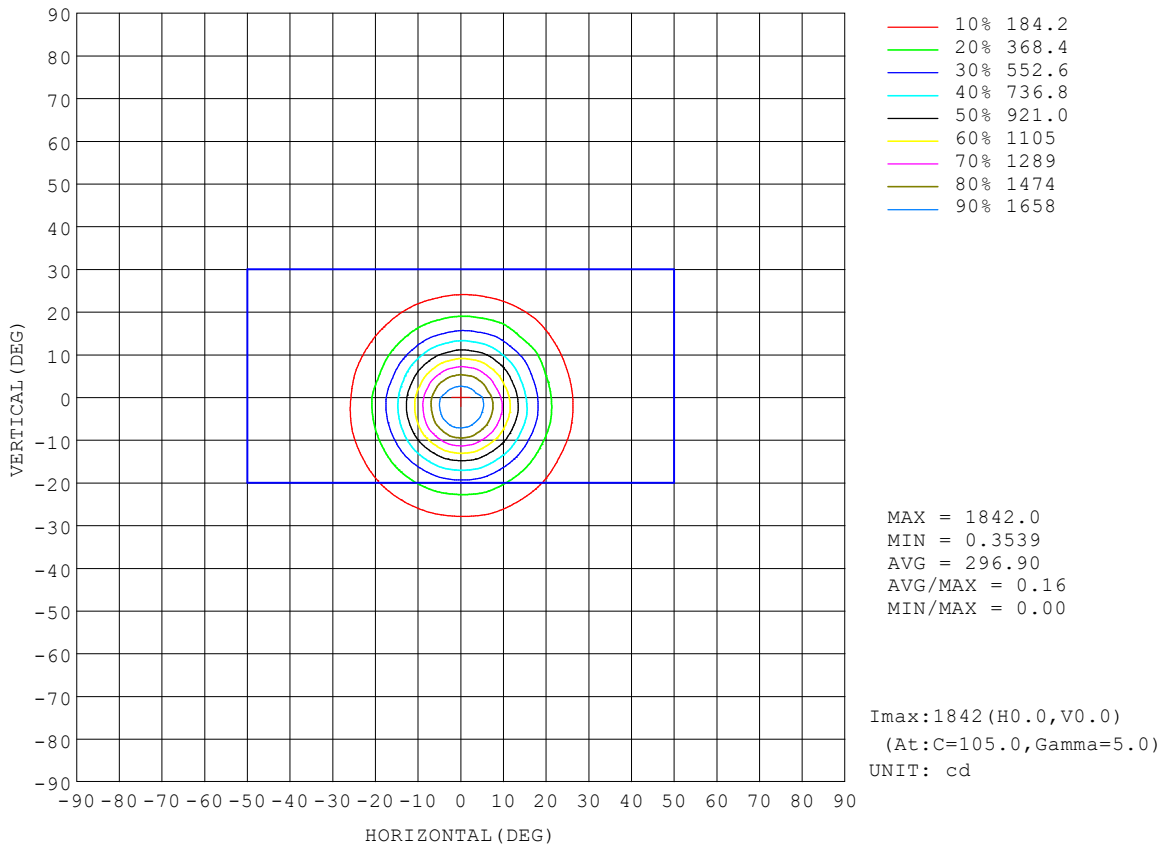


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.39V I:0.0605A P:7.3238W PF:0.5496 Freq:50.00Hz Lamp Flux:498.864x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

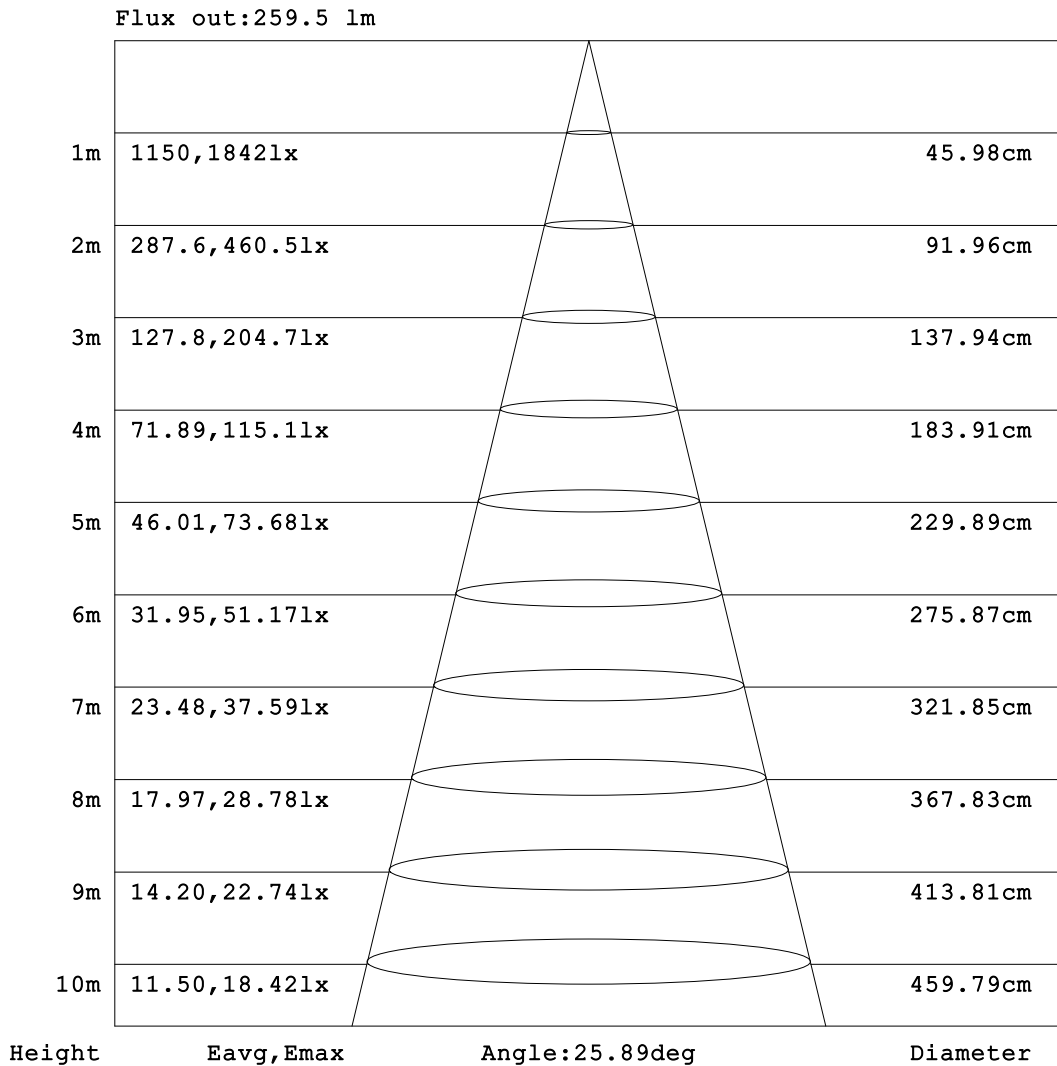


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.39V I:0.0605A P:7.3238W PF:0.5496 Freq:50.00Hz Lamp Flux:498.864x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

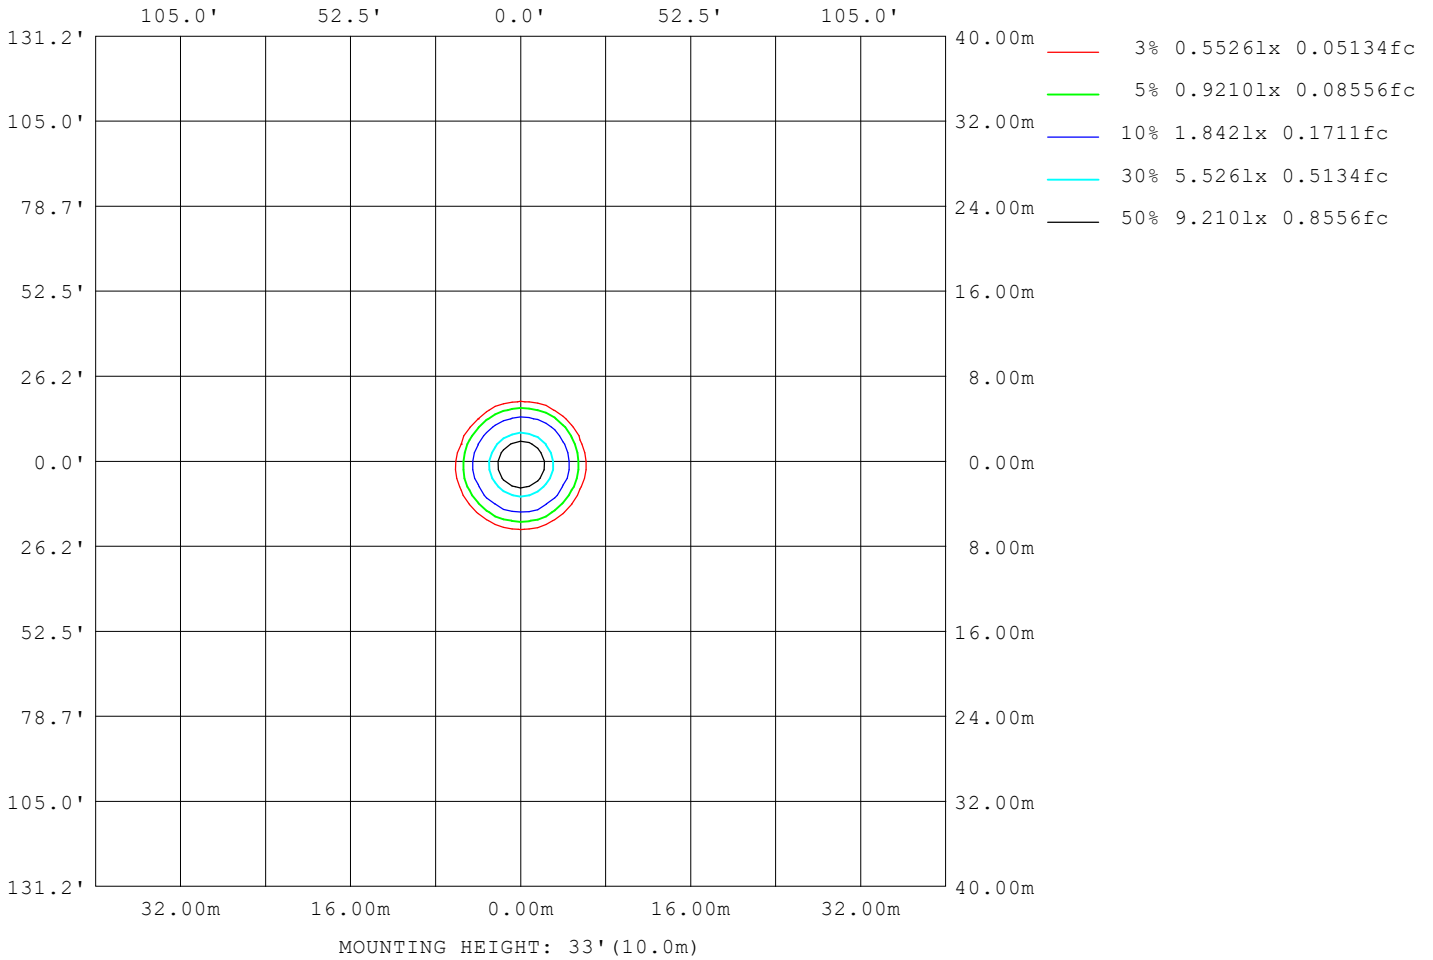

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2024-01-22

γ Range: 0 - 90DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.39V I:0.0605A P:7.3238W PF:0.5496 Freq:50.00Hz Lamp Flux:498.864x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2
L_0~180 (75) av	2
L_0~180 (85) av	0
L_90~270 (65) av	2
L_90~270 (75) av	2
L_90~270 (85) av	0
L_45 (65) av	2
L_45 (75) av	3
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

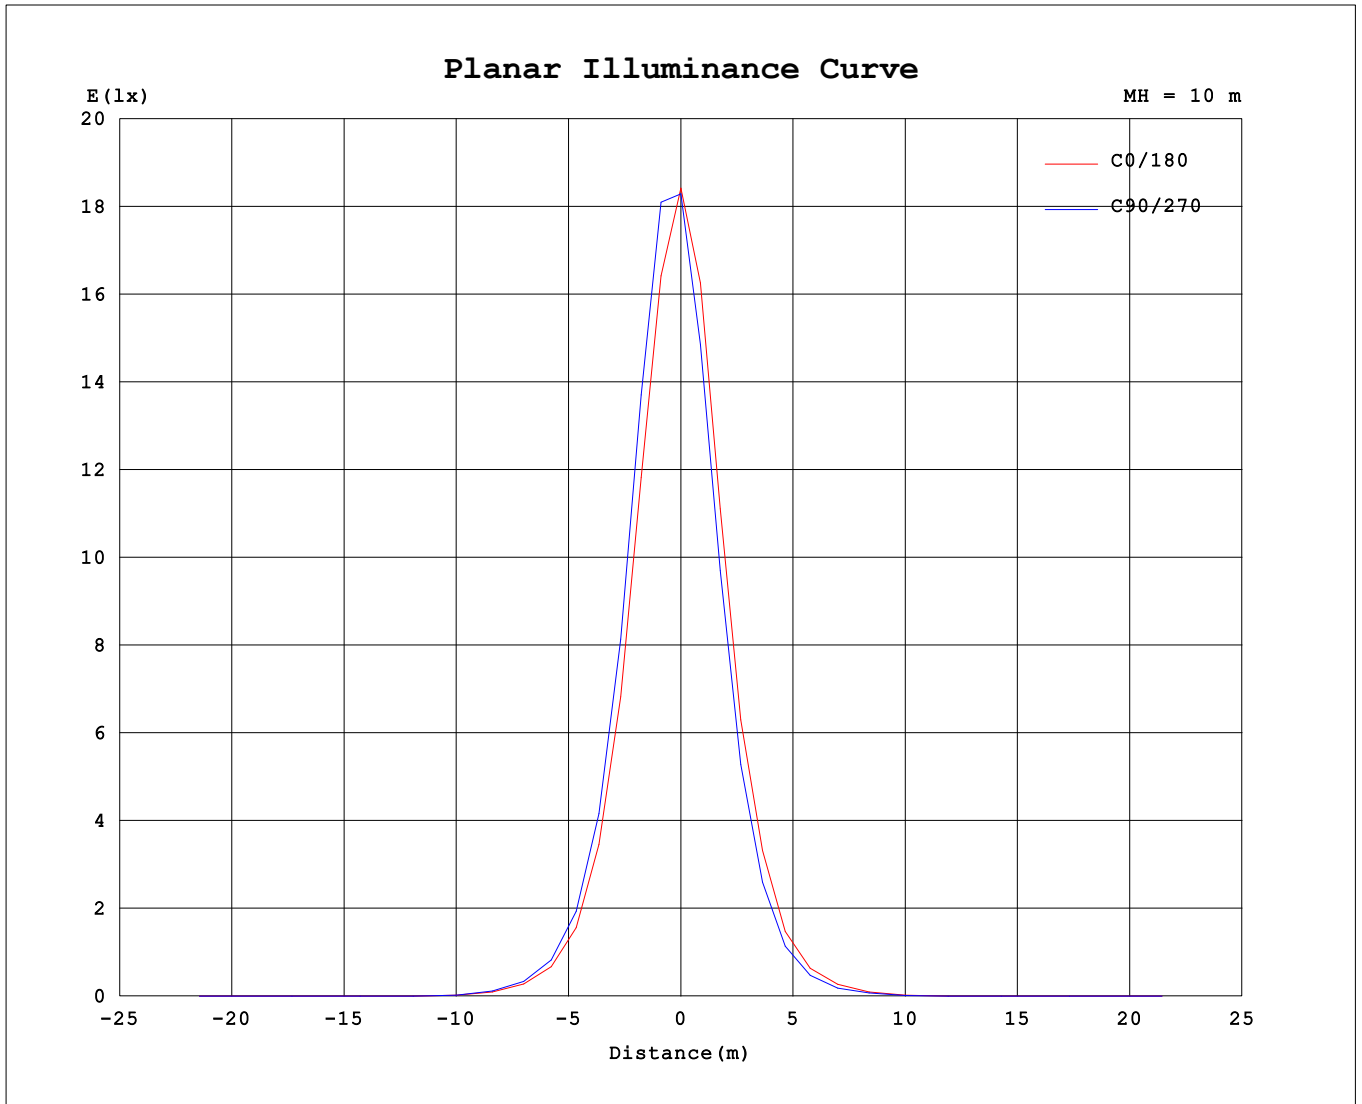

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.39V I:0.0605A P:7.3238W PF:0.5496 Freq:50.00Hz Lamp Flux:498.864x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1828	1828	1828	1828	1828	1828	1828	1828	1828	1828	1828	1828	1828	1828	1828	1828	1828	1828	1828
5	1649	1695	1724	1769	1790	1823	1831	1838	1806	1773	1718	1681	1633	1587	1561	1528	1514	1498	1503
10	1229	1293	1332	1378	1398	1434	1435	1432	1383	1348	1277	1219	1155	1095	1067	1033	1020	1001	1015
15	751	806	826	865	878	913	903	901	862	834	785	747	694	644	622	598	590	576	587
20	414	445	450	474	486	512	502	502	482	465	434	416	397	349	333	315	312	303	313
25	209	223	226	244	251	269	260	261	250	243	226	217	197	188	167	155	153	149	154
30	103	108	109	119	123	131	128	127	124	121	113	109	98.0	87.2	80.4	75.3	74.1	71.3	73.1
35	50.6	53.6	53.1	57.8	58.3	62.9	62.4	61.5	59.4	59.1	57.5	55.5	49.1	44.1	40.5	37.6	37.2	35.7	34.1
40	21.1	24.7	25.5	26.7	26.9	28.6	26.8	27.1	27.6	28.9	29.2	27.1	21.6	20.1	20.1	18.2	17.5	16.6	16.3
45	6.35	7.13	9.58	11.4	11.4	9.56	7.97	8.58	11.2	13.3	12.6	9.50	7.90	7.16	8.01	7.06	6.48	5.78	5.57
50	1.70	2.06	3.17	4.39	3.42	2.50	1.55	2.13	3.07	4.75	4.37	3.06	2.02	2.22	2.70	2.70	2.20	1.86	1.78
55	0.21	0.26	0.66	0.92	0.47	0.17	0.10	0.07	0.59	1.04	1.06	0.47	0.27	0.36	0.59	0.69	0.46	0.38	0.29
60	0.14	0.07	0.12	0.04	0.08	0.00	0.04	0.00	0.07	0.02	0.10	0.03	0.02	0.11	0.10	0.20	0.15	0.23	0.17
65	0.12	0.05	0.10	0.02	0.07	0.00	0.02	0.00	0.05	0.00	0.07	0.02	0.01	0.11	0.10	0.18	0.14	0.21	0.15
70	0.09	0.04	0.08	0.01	0.05	0.00	0.01	0.00	0.04	0.00	0.07	0.00	0.01	0.10	0.08	0.18	0.13	0.20	0.13
75	0.08	0.01	0.06	0.00	0.03	0.00	0.00	0.00	0.01	0.00	0.03	0.00	0.00	0.08	0.07	0.16	0.11	0.18	0.11
80	0.06	0.01	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.00	0.07	0.04	0.11	0.09	0.16	0.10
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-01-22

γ Range: 0 - 90DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

